


Features

- Acrylic
- Drop-in or three-wall alcove
- Molded lumbar supports and armrests
- Optional K-1283 removable apron
- Optional K-1491 removable bath pillow
- 72" (1829 mm) x 42" (1067 mm) x 20-1/8" (511 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- IAPMO/UPC
- ASTM E162
- ASTM E662

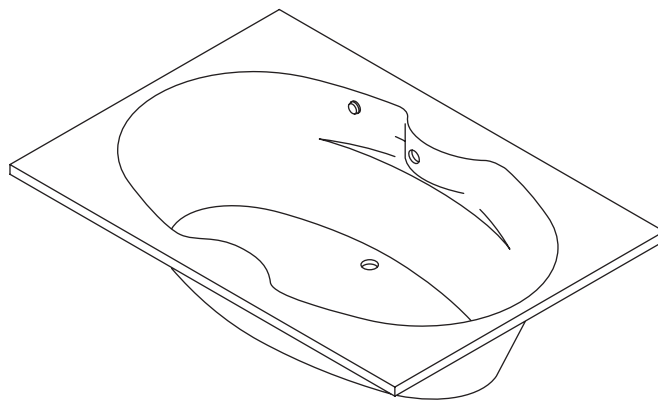

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1132	Bath – drop-in (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1132-F	Bath – tile flange	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories

K-11677	Swiftflo™ bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB
---------	----------------------	-----------------------------	-----------------------------

Optional Accessories

K-1283	Removable apron	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1491	Removable bath pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Product Specification

The acrylic bath shall be 72" (1829 mm) in length, 42" (1067 mm) in width, and 20-1/8" (511 mm) in height. Bath shall be for drop-in or three-wall alcove installation. Bath shall feature molded lumbar supports and armrests. Bath shall have an optional K-1283 removable apron and an optional K-1491 removable bath pillow. Bath shall be Kohler Model K-1132-____ or K-1132-F-_____.

PROFLEX[®] 7242

Technical Information

Fixture*:	
Basin area	
Basin area, bottom	53" (1346 mm) x 26" (660 mm)
Basin area, top	65" (1651 mm) x 34" (864 mm)
Weight	51 lbs (23.1 kg)
To overflow	
Water depth	15" (381 mm)
Capacity	78 gal (295.3 L)
* Approximate measurements for comparison only.	
Drop-in cut-out	70-1/2" (1791 mm) x 40-1/2" (1029 mm)




Installation Notes

Install this product according to the installation guide.


Floor support under bath must provide for a minimum of 35 lbs/square foot (169 kg/square meter) loading.

The apron must be installed before the finished floor and wall materials are installed.

No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)

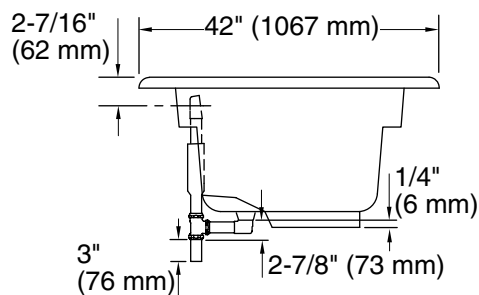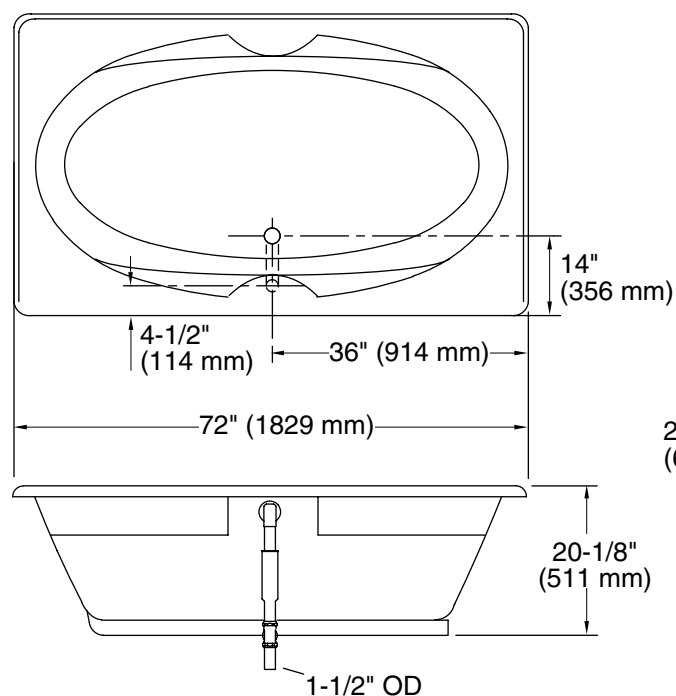

Tile Flange Detail



Drop-in Rim Detail

Product Diagram