

PURIST_®

Features

- Fireclay
- Without overflow
- Countertop or wall-mount installation
- Without faucet holes
- Complements the Purist Suite
- 24" (61 cm) x 23-1/2" (59.7 cm)


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.19.2/CSA B45.1

Wading $POOL_{\odot}$ WET SURFACE LAVATORY K-2313

ADA CSA B651 OBC

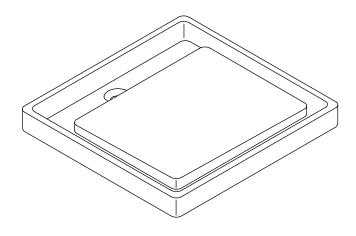

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- · CP: Polished Chrome
- NA: None applicable

Specified Model

Model	Description	Colors/Finish	es
K-2313	Wading Pool wet surface lavatory - without faucet holes	0	□ Other
Recommend	ed Accessories		
K-9583	Bracket kit - includes right and left-facing brackets for wall-mount installation		□ NA
K-7605-P	Lavatory supplies	□ CP	□ Other
K-9018	P-Trap	□ CP	☐ Other
K-9010	Grid drain	□ CP	□ Other

Product Specification

The fireclay lavatory shall be 24" (61 cm) in length and 23-1/2" (59.7 cm) in width. Product shall be without overflow and without faucet holes. Product shall be suitable for countertop or wall-mount installation. Product shall complement the Purist Suite. Product shall be Kohler Model K-2313-_____.

PURIST®

Technical Information

Fixture*:				
Drain hole	1-3/4" (4.4 cm) D.			
* Approximate measurements for comparison only.				
Included components:				
Cut-out template	1014137-7			

Installation Notes

Install this product according to the installation guide.


Product does not have an overflow.

NOTICE: Countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by Kohler Co. (call 1-800-4-KOHLER). Kohler Co. is not responsible for cutout errors when the incorrect cut-out template is used.

Will comply with ADA when installed per section 606 Lavatories of the Act.

Will comply with CSA B651 when installed per Clause 4.3.3 of the standard.

Will comply with **OBC** when installed per Clause 3.8.3.11.

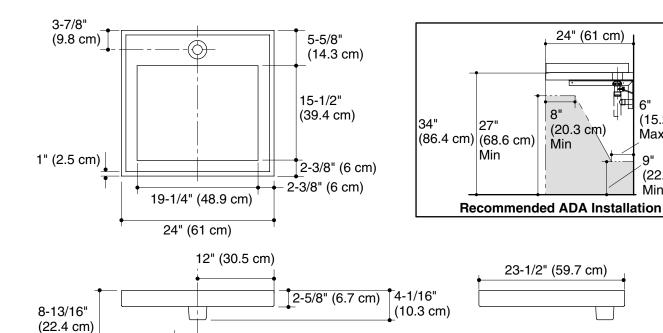





(15.2 cm)

(22.9 cm)

Max

9"

Min

3" (7.6 cm)

1-1/4" OD