


Features

- Brass construction
- Brass valve bodies
- Valvet® valves
- Adjustable flanges
- For 8" (203 mm) centers
- Stationary gooseneck spout
- 7-3/4" (197 mm) spout reach
- 1/2" NPT inside threaded inlets
- Lower flow aerator options available (refer to the Kohler Price Book)
- 2.2 gallons (8.3 L) per minute maximum flow rate

UTILITY SINK FAUCET K-7320

ADA

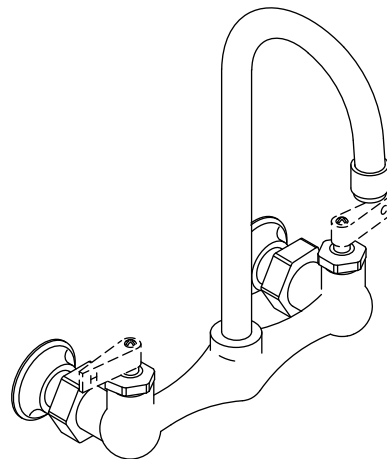

Codes/Standards Applicable



Specified model meets or exceeds the following at date of manufacture:

- ADA
- ICC/ANSI A117.1
- ASME A112.18.1/CSA B125.1
- Energy Policy Act of 2005
- NSF 61
- All applicable US Federal and State material regulations

Colors/Finishes

- CP: Polished Chrome
- BN: Brushed Nickel
- Other: Refer to Price Book for additional colors/finishes

Specified Model

| Model | Description | Cross Handles  | | | Lever Handles  | | |
|----------|-----------------------------|--|-----------------------------|------------------------------------|--|-----------------------------|------------------------------------|
| K-7320-3 | Utility sink faucet | <input type="checkbox"/> CP | <input type="checkbox"/> BN | <input type="checkbox"/> Other____ | | | |
| K-7320-4 | Utility sink faucet (shown) | | | | <input type="checkbox"/> CP | <input type="checkbox"/> BN | <input type="checkbox"/> Other____ |

| Optional Accessories | | |
|----------------------|---|-----------------------------|
| 1160594 | Large Spray 0.35 gpm (1.32 lpm) – Insert only | <input type="checkbox"/> NA |
| _____ | Additional flow options are available (refer to the Price Book) | <input type="checkbox"/> NA |

Product Specification


The two-handle service sink faucet shall be of brass construction with brass valve bodies. Product shall have a maximum flow rate of 2.2 gallons (8.3 L) per minute with lower flow aerator options available (refer to the Kohler Price Book). Product shall feature Valvet valves, 7-3/4" (197 mm) spout reach, and stationary gooseneck spout. Product shall feature adjustable flanges and 1/2" NPT inside threaded inlets. Product shall be for 8" (203 mm) centers. Faucet shall be Kohler Model K-7320-____-____.

TRITON®

Installation Notes

Install this product according to the installation guide.

ADA compliant when installed to the specific requirement of the regulation.

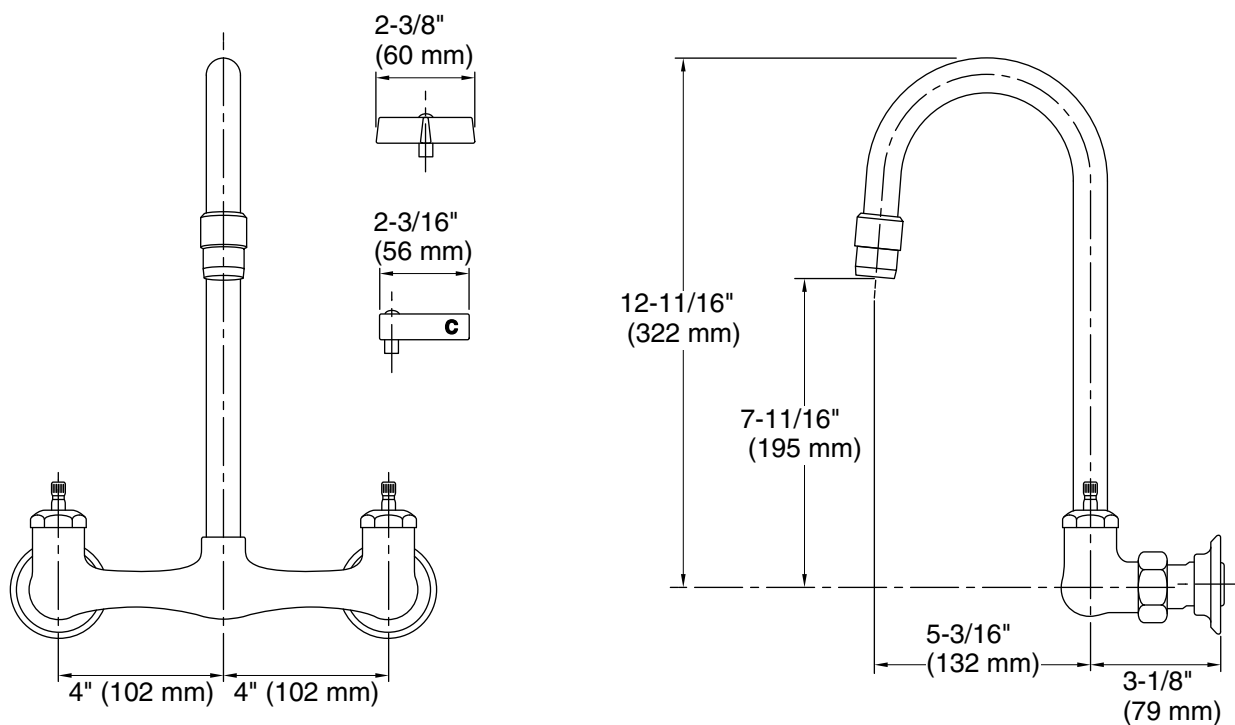

Product Diagram