


### Features

- Acrylic
- Integral high-dome ceiling
- Grab bar and shelf
- Integral soap ledges
- Left or right drain
- 60" (1524 mm) x 34-13/16" (884 mm) x 90" (2286 mm)

### 60" BATH AND SHOWER MODULE K-1681, K1682

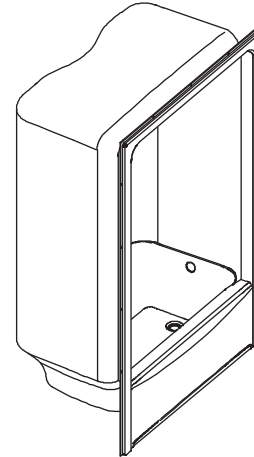

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories:

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-1681	Bath and shower module with drain at left	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1682	Bath and shower module with drain at right (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Required Accessories			
K-9459	Sonata accessory kit	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

Optional Accessories (continued on page 2)			
K-7166-AF	Drain (recommended)	<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other_____
K-9529	Removable Sonata bath whirlpool seat (recommended)	<input type="checkbox"/> 0	
K-1657, K-1663	Steam generator and control kit	<input type="checkbox"/> NA	
K-1708, K-1647-PC	Power Clean™ steam generator and control kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other_____
K-1665	Dome light	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

### Product Specification:

The acrylic bath and shower module shall be 60" (1524 mm) in length, 34-13/16" (884 mm) in width, and 90" (2286 mm) in height. Bath and shower module shall be available with left or right drain. Shower module shall have integral high-dome ceiling, integral soap ledges, grab bar, and shelf. Shower module shall be Kohler Model K-\_\_\_\_\_-\_\_\_\_\_.

# SONATA®

## Optional Accessories

K-704314	Senza® steam bypass bath door*	<input type="checkbox"/> SH	<input type="checkbox"/> BH	<input type="checkbox"/> Other_____
K-704221	Senza® bypass bath door*	<input type="checkbox"/> SH	<input type="checkbox"/> BH	<input type="checkbox"/> Other_____
K-703023	Forum™ bypass bath door*	<input type="checkbox"/> SH	<input type="checkbox"/> BH	<input type="checkbox"/> Other_____
K-704121	Portico™ steam bypass door*	<input type="checkbox"/> SH	<input type="checkbox"/> BH	<input type="checkbox"/> Other_____

\* Refer to the Fixtures Price Book for glass options.

## Technical Information

Fixture*:	basin area	top area
Bathing well	46" (1168 mm) x 23" (584 mm)	54" (1372 mm) x 27" (686 mm)
	water depth	capacity
To overflow	11-7/8" (302 mm)	55 gal (208.2 L)
Configuration	1-piece	
Drain	Ø 3-3/8" (86 mm)	
Weight	200 lbs (91 kg)	

\* Approximate measurements for comparison only

## Installation Notes


Install this product according to the installation guide.

Fixture not drilled for supply fittings.

**Shimming is required to level the fixture.**

Stud opening tolerance [+ 1/4" (6 mm) - 0" (0 mm)]. When a fire rated wall is specified, dimensions are to the inside of the wall board. Some shimming between the stud frame and the fixture may be required.

The K-1657/K-1663 or K-1708/K-1647-PC steam generator/control kit are designed for use with this product. Kohler shall not be responsible for problems encountered due to the installation and use of other manufacturer's steam generators.

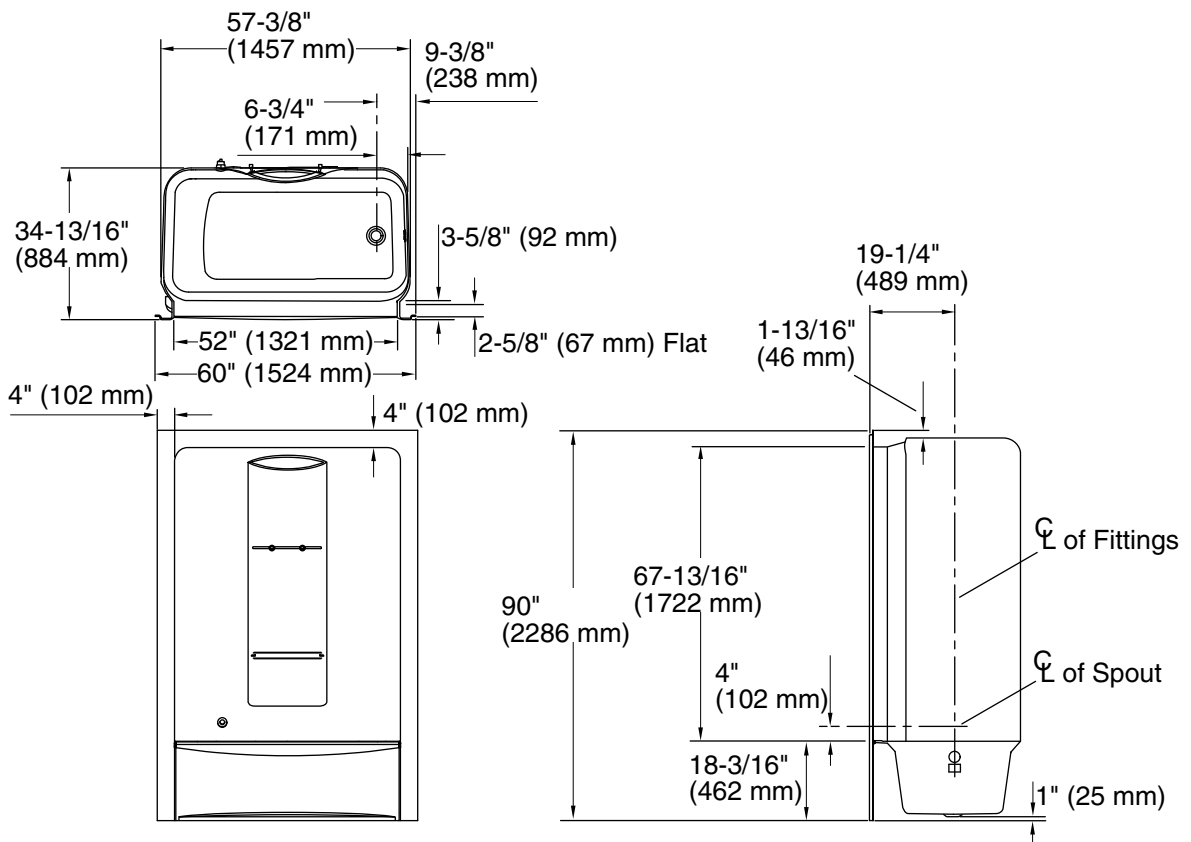

## Product Diagram