

### Features

- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit setting for added safety
- 9-1/16" (230 mm) swing spout reach
- Matching finish sidespray through escutcheon
- Flexible supplies
- Lower flow aerator options are available (refer to the Kohler Price Book)
- 2.2 gpm (8.3 lpm) maximum flow rate

## **Codes/Standards Applicable**

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- Energy Policy Act of 2005
- NSF 61
- All applicable US Federal and State material regulations



FORTE

**KITCHEN SINK FAUCET** 

## **Colors/Finishes**

- CP: Polished Chrome
- BN: Brushed Nickel
- Other: Refer to Price Book for additional colors/finishes

#### Accessories

• NA: None applicable

# **Specified Model**

Model	Description	Colors/Finishes		
K-10413	Kitchen sink faucet	□ CP	🗆 BN	General Other
Optional Accessories				
1030920	Sidespray deep roughing-in kit			

## **Product Specification**


The single-handle kitchen sink faucet shall be of metal construction. Product shall have a maximum flow rate of 2.2 gallons (8.3 L) per minute with lower flow aerator options available (refer to the Kohler Price Book). Product shall feature a one-piece, self-contained ceramic disc valve, which allows both volume and temperature control. Product shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Product shall feature a high-temperature limit setting for added safety, 9-1/16" (230 mm) swing spout reach, matching finish sidespray through escutcheon, and flexible supplies. Faucet shall be Kohler Model K-10413-\_\_\_\_.



## **Installation Notes**

Install this product according to the installation guide.

ADA compliant when installed to the specific requirement of the regulation.

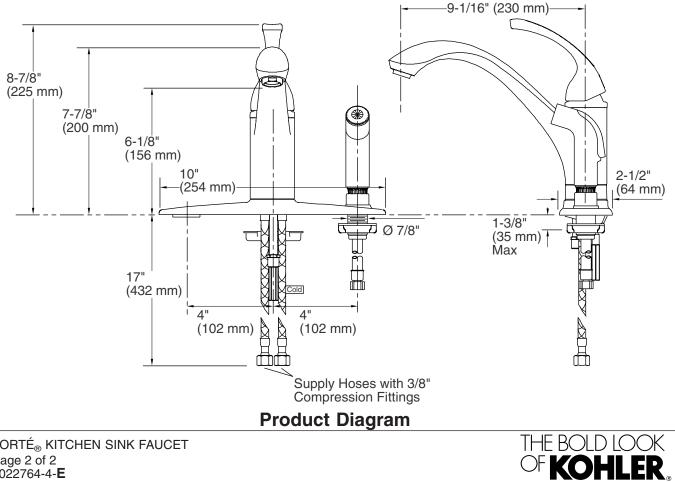

FORTÉ® KITCHEN SINK FAUCET Page 2 of 2 10Ž2764-4-E