


### Features

- Acrylic
- Variable speed pump with 1.5 kW heater, back-lit user keypad, and remote control
- 8 Flexjet™ whirlpool jets
- 8 effervescent ports
- 4 chromatherapy lights
- 240 V, 20 A electrical service
- UL listed
- Color-matched jet trim included
- Coordinating Portrait® Suite
- 67" (1702 mm) x 42" (1067 mm) x 22" (559 mm)

### 5.5' SPA EXPERIENCE BATH WHIRLPOOL K-1457-AH

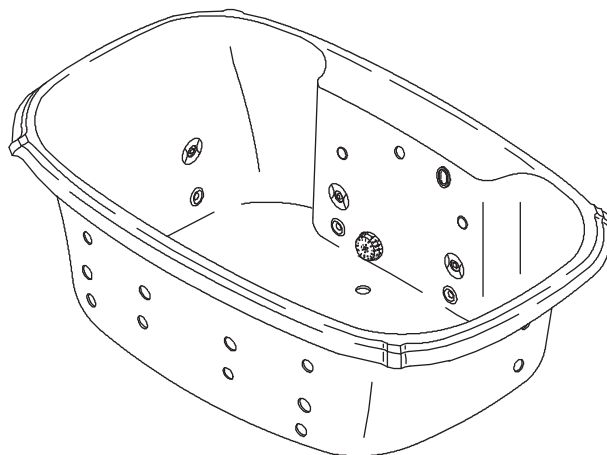

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASME A112.19.7
- CSA B45.10
- CSA C22.2 No 218.2
- UL 1795
- ASTM E162
- ASTM E662

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-1457-AH	5.5' Spa Experience bath whirlpool	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

#### Recommended Accessories

K-7161-AF	Adjustable pop-up drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
K-15880-K	Coralais base faucet (requires handle kit) <b>OR</b>	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
K-15881-K	Coralais base faucet (requires handle kit) <b>OR</b>	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
K-16122	Revival faucet	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____

#### Optional Accessories

K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1601	Footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

### Product Specification

The acrylic bath whirlpool shall be 67" (1702 mm) in length, 42" (1067 mm) in width, and 22" (559 mm) in height. Product shall have 8 Flexjets, 8 effervescent ports, and 4 chromatherapy lights. Product shall feature a variable speed pump, 1.5 kW heater, back-lit user keypad, and remote control. Product shall have a 240 V, 20 A electrical service. Product shall be UL listed. Product shall include color-matched jet trim. Product shall coordinate with Portrait Suite. Bath whirlpool shall be Kohler Model K-1457-AH-\_\_\_\_\_.

# PORTRAIT®

## Technical Information

Fixture*:				
Bathing well:				
Basin area, bottom	50" (1270 mm) x 29" (737 mm)			
Basin area, top	61" (1549 mm) x 32" (813 mm)			
Weight	140 lbs (64 kg)			
To overflow:				
Water depth	16" (406 mm)			
Capacity	100 gal (378.5 L)			
* Approximate measurements for comparison only.				
Included component:				
Cut-out template	113311-7			
Pump	Heater	V	Hz	A
	1.5 kW	240	50/60	11
Minimum access panel (required):				
Pump/control	34" (864 mm) W x 15" (381 mm) H			

## Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Pump/control 220-240 V, 20 A, 50/60 Hz

## Installation Notes

Install this product according to the installation guide.


Floor support under whirlpool must provide for a minimum of 47 lbs/square foot (230 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

Recommended Faucet Area

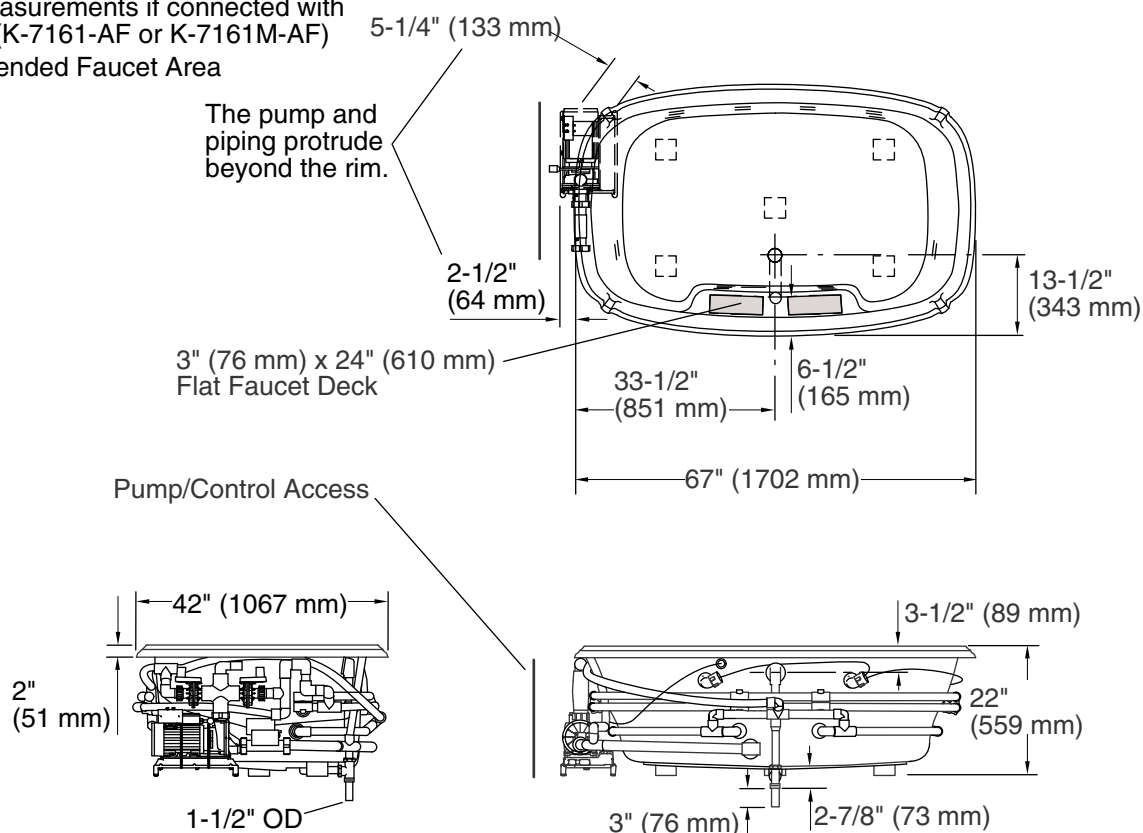

## Product Diagram