

Features

- Metal construction
- ADA compliant lever handles
- (2) Quarter-turn washerless ceramic disc valves
- Stainless steel
- Double quarter-turn ceramic disc valves ensure reliable on/off operation
- Deck-mount installation
- Anti-rotational flange simplifies installation
- 22" (559 mm) extended swing spout reach
- Fixed position wall flange
- 4 gallons (15.1 liters) per minute minimum flow rate at 45 psi (3.1 bars)


Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- NSF 61
- All applicable US Federal and State material regulations

DECK-MOUNT POT FILLER FAUCET K-7323

ADA

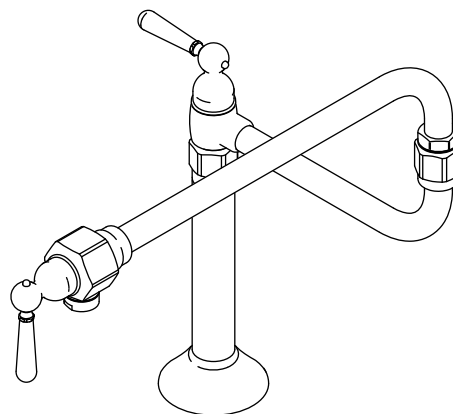

Colors/Finishes

- BS: Brushed Stainless Steel
- S: Polished Stainless Steel

Specified Model

Model	Description	Color/Finish
K-7323-4	Deck-mount pot filler faucet	<input type="checkbox"/> BS <input type="checkbox"/> S

Product Specification


The deck-mount pot filler faucet shall be made of stainless steel construction. Product shall have a minimum flow rate of 4.0 gallons (15.1 liters) per minute at 45 psi (3.1 bar). Product shall feature double quarter-turn ceramic disc valves which ensure reliable on/off operation. Product shall be for deck-mount installation. Product shall feature an anti-rotational flange which simplifies installation. Product shall feature a 22" (559 mm) extended swing spout reach, and a fixed position wall flange. Faucet shall be Kohler Model K-7323-4-_____.

HIRISE™

Installation Notes

Install this product according to the installation guide.

ADA compliant when installed to the specific requirement of the regulation.

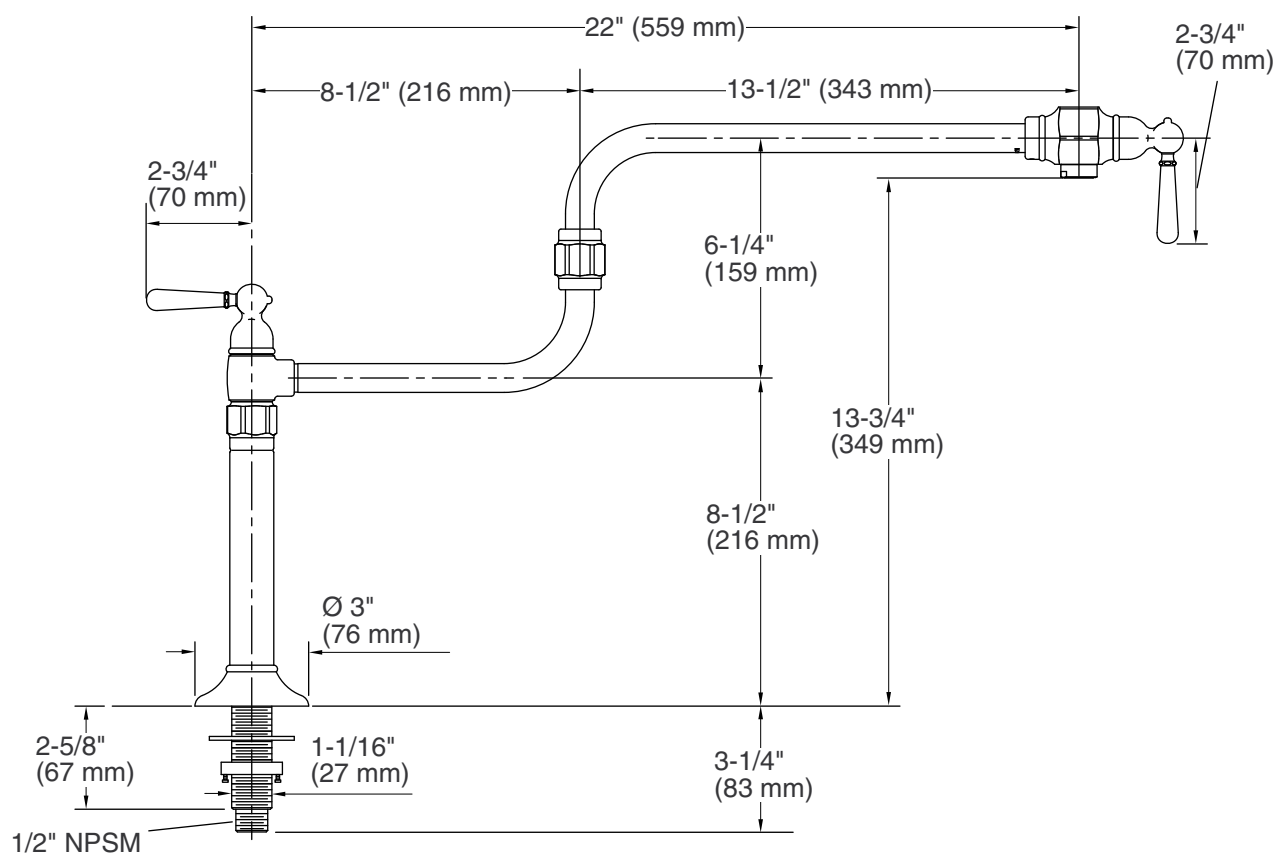

Product Diagram