


Features

- Acrylic
- Integral apron with removable access panel
- Blower with electronic control
- Left or right drain
- Blower motor is supplied with a grounding-type plug-in cord
- 120 BubbleMassage™ airjets
- Integral tile flange
- Slotted overflow for maximum bathing depth
- Low threshold height
- Integral lumbar support
- Armrests
- 72" (1829 mm) x 36" (914 mm) x 19" (483 mm)

6' BUBBLEMASSAGE™ BATH WITH AIRJETS

K-1124-GLA
ALSO K-1124-GRA

ADA

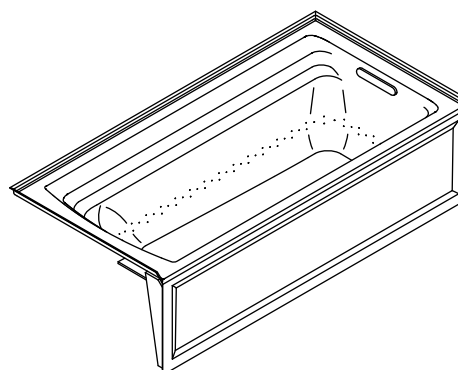

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B45.5/IAPMO Z124
- IAPMO IGC 171
- ASTM E162
- ASTM E662
- UL 1795

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1124-GLA	Integral apron, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1124-GRA	Integral apron, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Required Accessories			
K-7271	Clearflo slotted overflow brass bath drain OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-7272	Clearflo slotted overflow bath drain – PVC pipe	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
Recommended Accessories			
K-1446	Remote blower installation kit	NA	
Optional Accessories			
K-9529	Removable bath seat	<input type="checkbox"/> 0	

Product Specification

The acrylic bath with airjets shall be 72" (1829 mm) in length, 36" (914 mm) in width, and 19" (483 mm) in height. Bath shall feature an integral apron with removable access panel and integral tile flange. Bath shall have a blower with an electronic user control. The blower motor shall have a grounding-type plug-in cord. Bath shall have 120 BubbleMassage™ airjets. Bath shall be available with left or right drain. Bath shall have slotted overflow for maximum bathing depth, low threshold height, integral lumbar support, and armrests. The bath shall be Kohler Model K-1124-_____-_____.

ARCHER™

Technical Information

Fixture*:				
Bathing well				
Basin area, bottom	51-3/8" (1305 mm) x 21" (533 mm)			
Basin area, top	64-1/2" (1638 mm) x 30-1/2" (775 mm)			
Weight	115 lbs (52.1 kg)			
To overflow				
Water depth	15" (381 mm)			
Capacity	72 gal (273 L)			
* Approximate measurements for comparison only.				
Blower motor:	Heater	V	Hz	A
	300 W	120	60	5

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Blower motor:	120 V, 15 A, 60 Hz
Blower motor is supplied with a 24" (610 mm) grounding-type plug-in cord.	

Installation Notes

Install this product according to the installation guide.

NOTICE: Relocation of the blower motor and check valve is optional. Only mount the blower motor and check valve together. Do not move one without the other.


NOTICE: Two access panels are required for blower motor and check valve relocation. Provide one access panel at the blow motor/control location and another at the control box.

Floor support under this product must provide for a minimum of 42 lbs/square foot (201 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Will comply with **ADA** when installed per Section 607 Bathtubs of the Act.

No change in measurements if connected with drain illustrated. (K-7272)

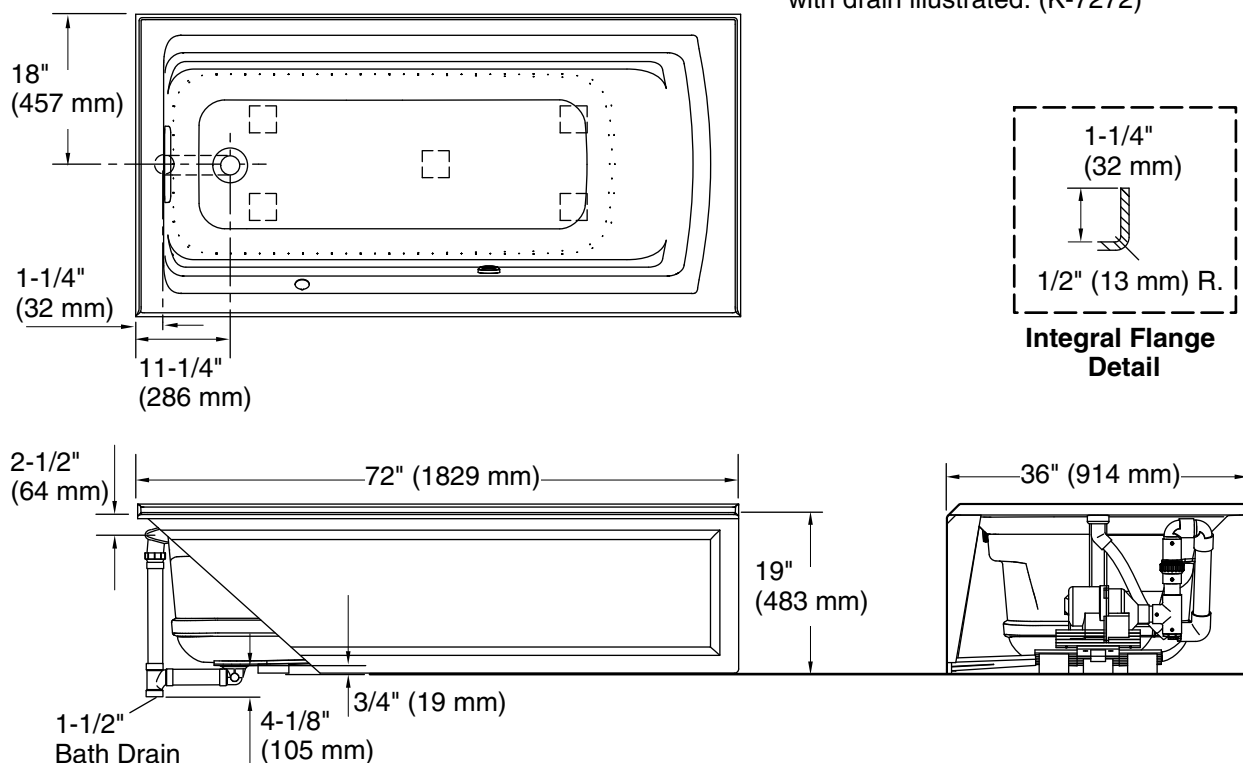

Product Diagram