

Features

- Brass construction
- Fixture-mount design
- Includes four 1.5 V AA batteries
- Electronic infrared sensor with TriPoint™ technology for accurate activation
- Intended for urinal installations with 3/4" spud coupling connection
- Retrofit models require a control stop and vacuum breaker
- 0.125 gal (0.47 L) per flush flow rate
- WaterSense® compliant when used with K-4904-ET


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- CSA B64
- CSA B125.3
- ASSE 1037
- FCC 47, Part 15
- EN 55022
- ASME A112.18.1/CSA B125.1
- EPA WaterSense®
- ICES-003 Class B

EXPOSED FLUSHOMETER K-10949

ADA CSA B651 OBC

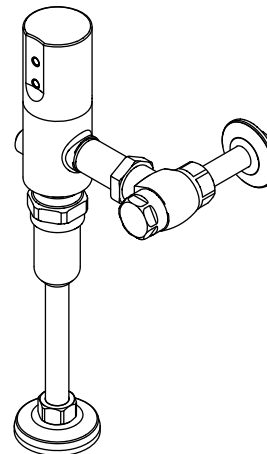

Colors/Finishes

- CP: Polished Chrome

Specified Model:

Model	Description	Colors/Finishes
K-10949	Exposed flushometer – 0.125 gpf (0.47 lpf), washdown	<input type="checkbox"/> CP

PRODUCT SPECIFICATION

Electronic flushometer shall be made of brass construction. Valve shall feature electronic infrared sensor with TriPoint technology for accurate activation. Valve shall be of a fixture-mount design. Product is intended for urinal installations with a 3/4" spud coupling connection and retrofit models require a control stop and vacuum breaker. Valve shall have a 0.125 gal (0.47 L) per flush flow rate. Valve shall be WaterSense® compliant when used with K-4904-ET. Valve includes four 1.5 V AA batteries. Exposed flushometer shall be Kohler Model K-10949-CP.

Install this product according to the installation guide.

