


Features

- Brass construction
- Brass valve bodies
- Quarter-turn washerless ceramic disc valves
- For 4" (102 mm) centers
- Available with and without pop-up drain, lift rod, and tailpiece
- Variety of handle style options
- 4-7/16" (113 mm) spout reach with stationary spout
- Available with red and blue indexing [-X]
- 1.5 gallons (5.7 liters) per minute maximum flow rate

CENTERSET BATHROOM SINK FAUCET K-433, K-452

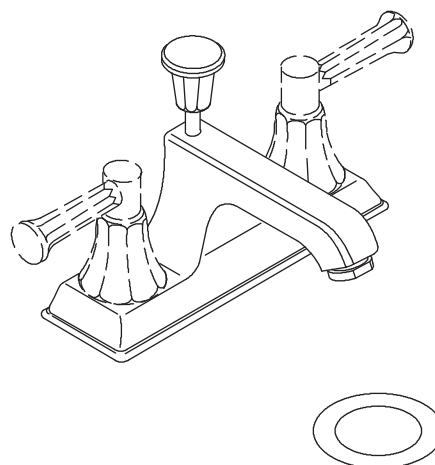

Codes/Standards Applicable




Specified model meets or exceeds the following at date of manufacture:

- ADA
- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- NSF 61
- EPA WaterSense®
- All applicable US Federal and State material regulations

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Stately Cross  ADA		Stately Lever  ADA		Stately Deco Lever  ADA	
K-433-X4V	Centerset bathroom sink faucet					<input type="checkbox"/> CP	
K-452-3S	Centerset bathroom sink faucet	<input type="checkbox"/> CP	<input type="checkbox"/> Other				
K-452-4S	Centerset bathroom sink faucet			<input type="checkbox"/> CP	<input type="checkbox"/> Other		
K-452-4V	Centerset bathroom sink faucet					<input type="checkbox"/> CP	<input type="checkbox"/> Other
K-452-X4V	Centerset bathroom sink faucet					<input type="checkbox"/> CP	

Product Specification

The two-handle centerset bathroom sink faucet shall be of brass construction with brass valve bodies. Product shall feature a maximum flow rate of 1.5 gallons (5.7 liters) per minute. Product shall feature quarter-turn washerless ceramic disc valves and a 4-7/16" (113 mm) spout reach with stationary spout. Product shall be for 4" (102 mm) centers. Product shall be available with and without pop-up drain, lift rod, and tailpiece and a variety of handle options. Product shall be available with red and blue indexing [-X]. Faucet shall be Kohler Model K-____-____-____.


Optional Accessories

1160593	Small Spray 0.38 gpm (1.44 lpm) – Insert only	<input type="checkbox"/> NA
_____	Additional flow options are available (refer to the Price Book)	<input type="checkbox"/> NA

Installation Notes

Install this product according to the installation guide.

ADA compliant when installed to the specific requirements of these regulations.

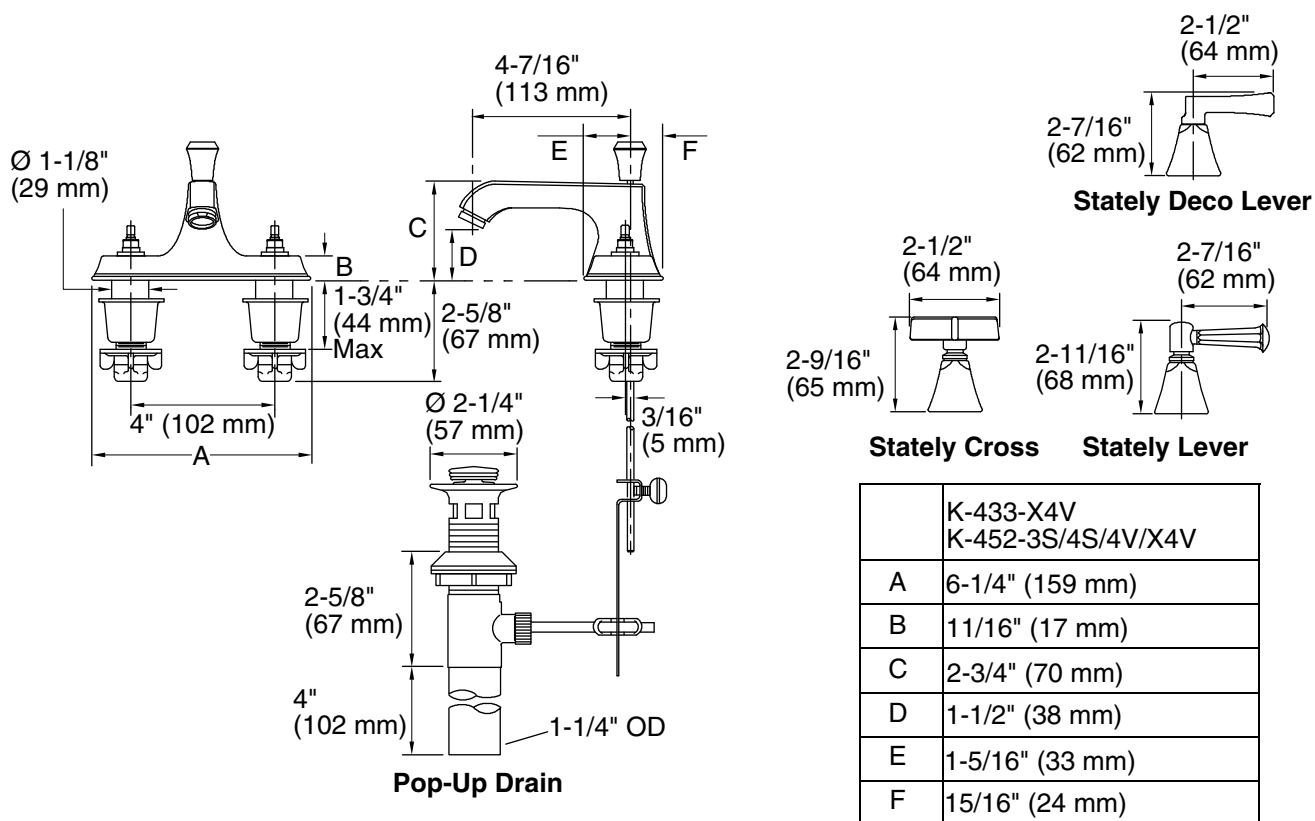

Product Diagram