


## Features

- Metal construction
- Brass valve bodies
- Pop-up drain with lift rod and tailpiece
- Flexible connections for easy installation
- Available with cross or lever handles
- For 8" (203 mm) or 16" (406 mm) centers
- 5-3/8" (137 mm) spout reach
- Stationary spout
- 1.5 gallons (5.7 liters) per minute maximum flow rate
- Quarter-turn washerless ceramic disc valves

## WIDESPREAD BATHROOM SINK FAUCET K-16232

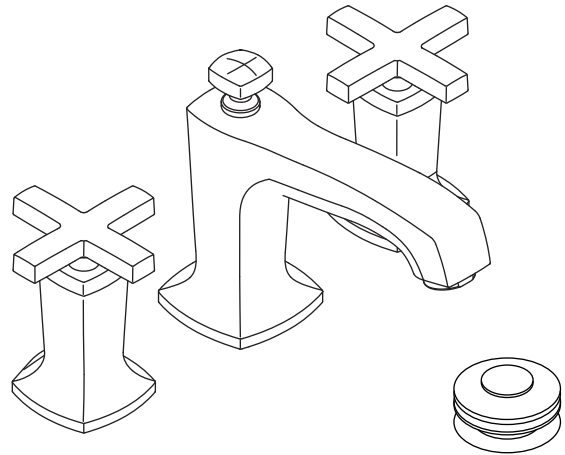

## Codes/Standards Applicable



Specified model meets or exceeds the following at date of manufacture:

- ADA
- ASME A112.18.1/CSA B125.1
- NSF 61
- ICC/ANSI A117.1
- Energy Policy Act of 2005
- EPA WaterSense®
- All applicable US Federal and State material regulations

## Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

## Specified Model

Model	Description	Cross		Lever	
		 ADA		 ADA	
K-16232-3	Widespread bathroom sink faucet with cross handles	<input type="checkbox"/> CP	<input type="checkbox"/> Other ____		
K-16232-4	Widespread bathroom sink faucet with lever handles			<input type="checkbox"/> CP	<input type="checkbox"/> Other ____

### Optional Accessories


Additional flow options are available (refer to the Kohler Price Book)

## Product Specification

The two-handle widespread bathroom sink faucet shall be made of metal construction with brass valve bodies. Product shall have a maximum flow rate of 1.5 gallons (5.7 liters) per minute. Product shall feature quarter-turn washerless ceramic disc valves. Product shall be for 8" (203 mm) or 16" (406 mm) centers. Product shall include flexible connections for easy installation and a pop-up drain with lift rod and tailpiece. Product shall feature a 5-3/8" (137 mm) spout reach and stationary spout. Product shall be available with cross or lever handles. Faucet shall be Kohler Model K-16232-\_\_\_\_-\_\_\_\_.

## Installation Notes

Install this product according to the installation guide.

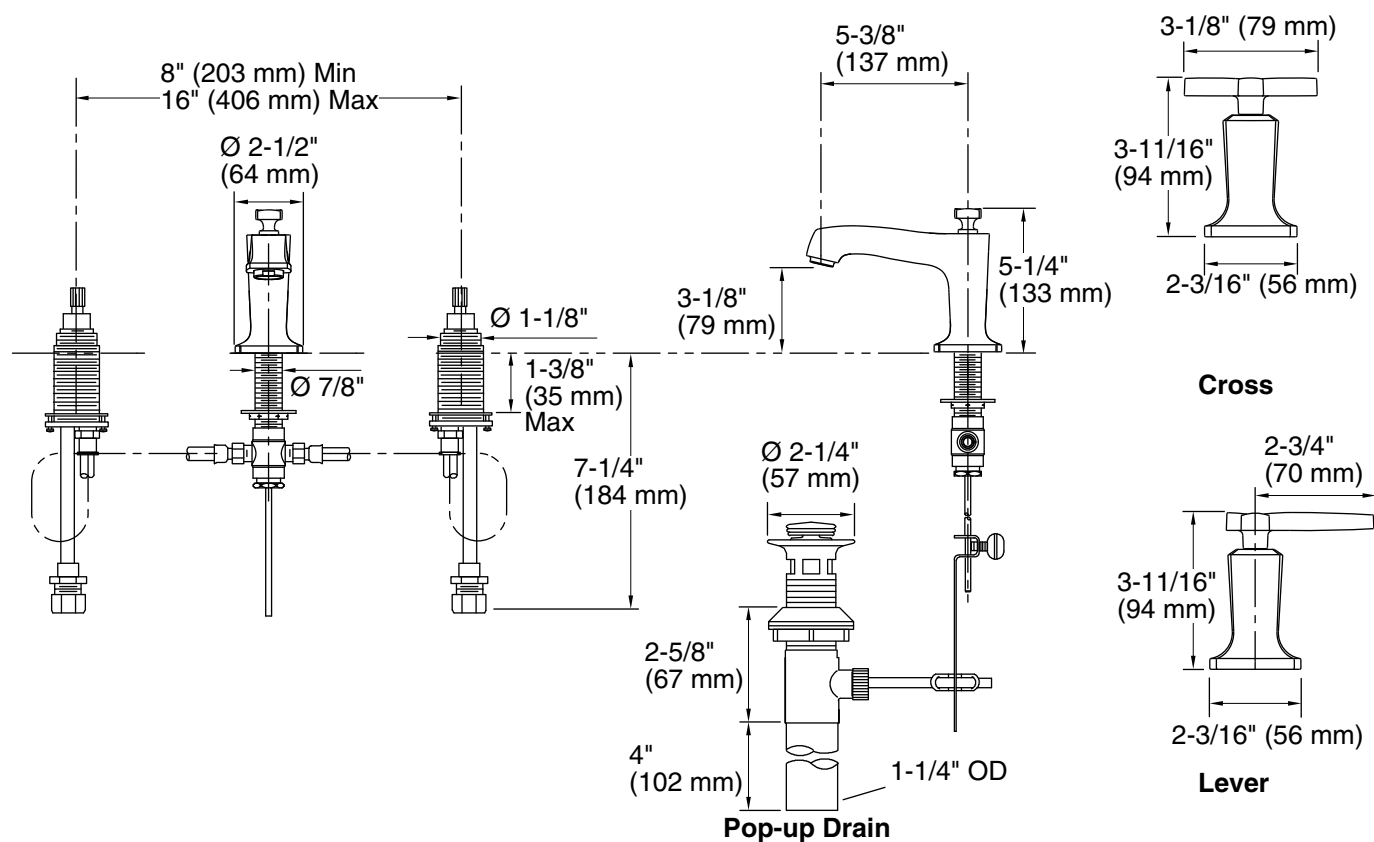

## Product Diagram