

#### **Features**


- Cast iron with Safeguard® finish
- Undermount installation
- Comfort Depth™ with low step-over height and slotted overflow increases bathing depth
- Less all trim
- 65-7/8" (1673 mm) x 32-5/16" (821 mm) x 18" (457 mm)

## **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ASME A112.19.1/CSA B45.2
- State of Massachusetts





#### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### **Accessories**

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

## **Specified Model**

Model	Description		Colors/Finishes	
K-895	Undermount bath		<b>0 0</b>	☐ Other
Required	Accessories			
K-7271	Clearflo slotted overflow brass bath drain OR	□ CP		☐ Other
K-7272	Clearflo slotted overflow bath drain – PVC pipe	□СР		☐ Other
Optional	Accessories	·		
K-1172	Adjustable feet			□NA

# **Product Specification**

The undermount bath shall be made of cast iron with Safeguard finish. Product shall be 65-7/8" (1673 mm) in length, 32-5/16" (821 mm), and 18" (457 mm) in height. Bath shall be for undermount installation. Product shall feature Comfort Depth with low step-over height and slotted overflow which increases bathing depth. Product shall be less all trim. Undermount bath shall be Kohler Model K-895-\_\_\_\_.

#### **Technical Information**


Fixture*:			
Bathing well:			
Basin area, bottom	45-3/4" (1162 mm) x 21-3/8" (543 mm)		
Basin area, top	60-7/8" (1546 mm) x 30" (762 mm)		
Weight	360 lbs (163.3 kg)		
To overflow:			
Water depth	13-7/8" (352 mm)		
Capacity	61 gal (231 L)		
* Approximate measurements for comparison only.			

### **Installation Notes**

Install this product according to the installation guide.

Floor support under bath must provide for minimum of 61 lbs/square foot (296 kg/square meter) loading.



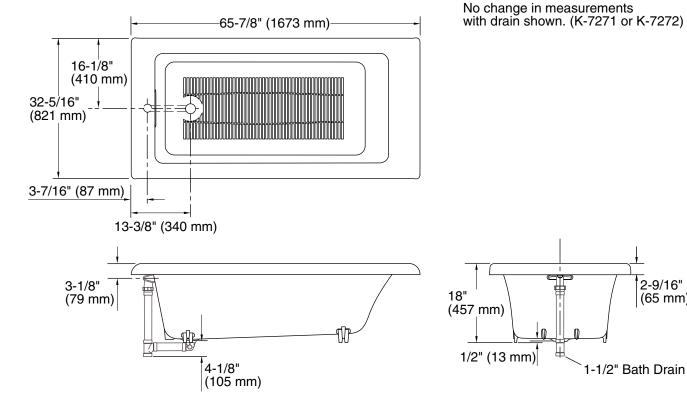

2-9/16"

(65 mm)