

Features

- Brass construction
- Dual control wall-mounted
- Stationary spout
- Less drain
- Available with a 9-1/4" (235 mm) or 11-1/4" (286 mm) spout reach
- ADA compliant traditional lever handles
- 1.5 gallons (5.7 liters) per minute maximum flow rate


**WALL-MOUNT BATHROOM SINK
FAUCET TRIM
K-T16106
ALSO K-T16107**



Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ASME A112.18.1/CSA B125.1
- IAPMO IGC 171
- NSF 61
- EPA WaterSense®
- All applicable US Federal and State material regulations

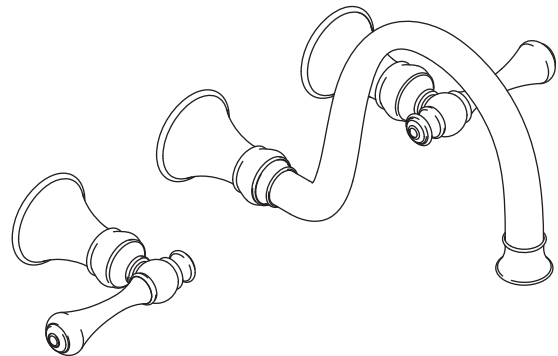

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Accessories

- NA: None applicable
- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-T16106-4A	Wall-mount bathroom sink faucet trim – 9-1/4" (235 mm) spout reach	<input type="checkbox"/> CP	<input type="checkbox"/> Other ____
K-T16107-4A	Wall-mount bathroom sink faucet trim – 11-1/4" (286 mm) spout reach	<input type="checkbox"/> CP	<input type="checkbox"/> Other ____
Required Accessory			
K-410-K	Two-handle ceramic valve	<input type="checkbox"/> NA	

Product Specification

The dual-control wall-mount faucet shall be of brass construction. Product shall have a maximum flow rate of 1.5 gallons (5.7 liters) per minute. Product shall feature a stationary spout and ADA compliant traditional lever handles. Product shall be available with a 9-1/4" (235 mm) or 11-1/4" (286 mm) spout reach. Product shall be less drain. Faucet shall be Kohler Model K-T____-4A - ____ with required K-410-K-NA valve.

REVIVAL®


Optional Accessories			
K-7114	Under-mount pop-up bathroom sink drain with tailpiece OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-7124	Touch activated bathroom sink drain with tailpiece OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-7127	Bathroom sink drain with non-removable metal stopper and tailpiece – 3" rough OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-7129	Bathroom sink grid drain with tailpiece	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
_____	Additional flow options are available (refer to the Kohler Price Book)		<input type="checkbox"/> NA

Installation Notes

Install this product according to the installation guide.

A minimum of 1-1/2" (38 mm) to 6" (152 mm) clearance space must be maintained between bottom of spout and top of the fixture rim.

Three 1-1/2" (38 mm) diameter cutout holes are required for the spout and handles.

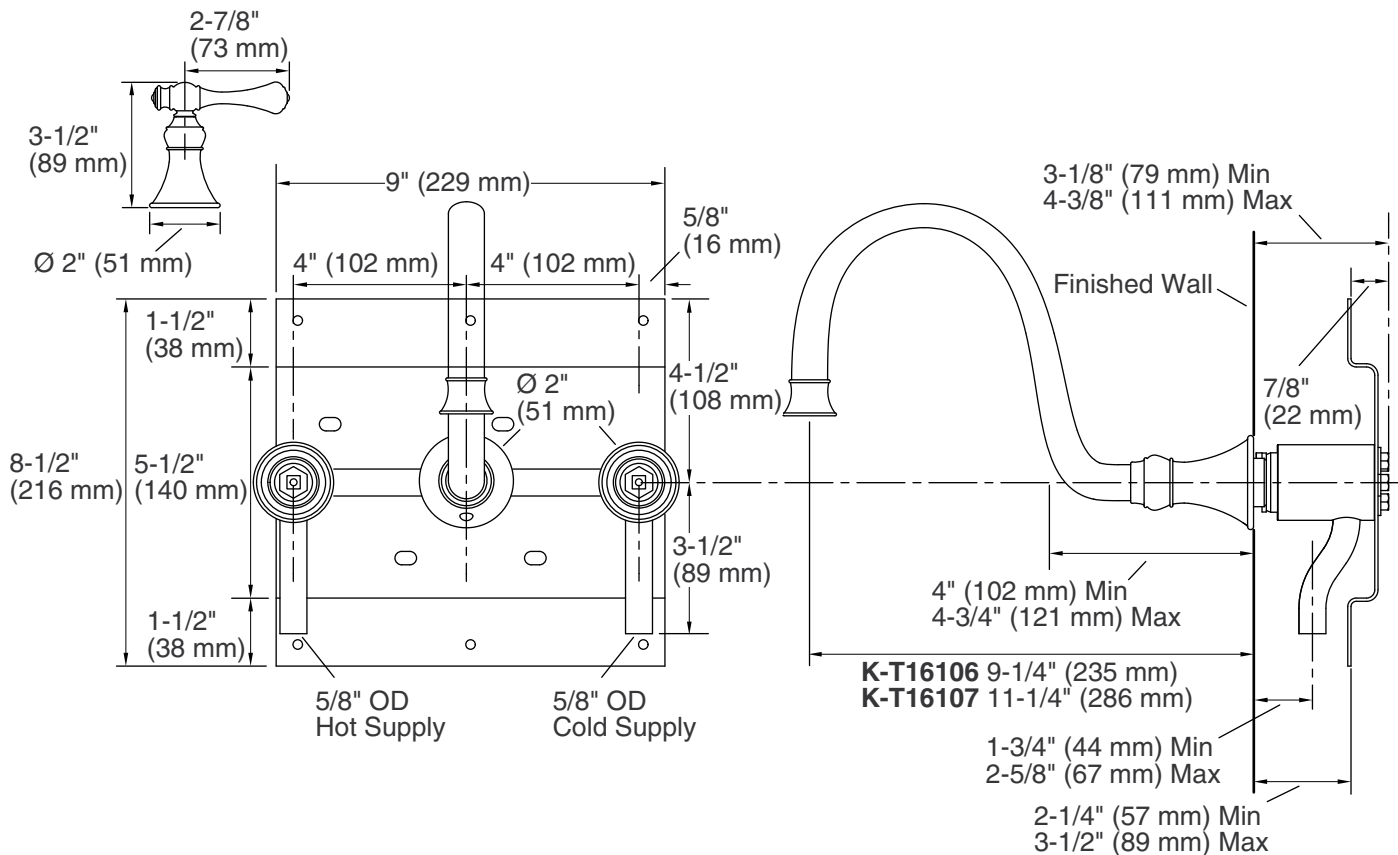

Product Diagram