# **KOHLER**<sub>®</sub>

#### Features

- Vitreous china
- Elongated bowl
- Class Five<sub>®</sub> flushing system
- One-piece
- Includes seat and cover
- Less supply
- 12" (305 mm) rough-in
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) glazed trapway
- 11" (279 mm) x 8-1/2" (216 mm) water area
- 28-3/8" (721 mm) x 18-3/4" (476 mm) x 28" (711 mm)

#### **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- ASME A112.19.2/CSA B45.1
- EPA WaterSense<sub>®</sub>



TOILET

K-3615

**GABRIELLE**<sup>TM</sup>

COMFORT HEIGHT<sub>®</sub> COMPACT



#### **Colors/Finishes**

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### Accessories

- 0: White
- CP: Polished Chrome
- $\bullet~$  PB: Vibrant\_ $_{\! \ensuremath{\mathbb{R}}}$  Polished Brass
- Other: Refer to Price Book for additional colors/finishes

#### **Specified Model**

Model	Description	Trip Lever	Colors/Finishes	
K-3615	Comfort Height <sub>®</sub> compact toilet	left-hand	0 🗆	Other
K-3615-RA	Comfort Height compact toilet	right-hand	0 🗆	Other
Recommend	ed Accessories			

Recommended Accessories					
K-7637	Angle supply with stop		🗆 CP	🗆 PB	Other
K-4650	Lustram open front toilet seat - for Accessibility compliance	0 🗆			Other

#### **Product Specification**

The compact one-piece elongated bowl toilet shall be made of vitreous china. Toilet shall be 28-3/8'' (721 mm) in length, 18-3/4'' (476 mm) in width, and 28'' (711 mm) in height. Toilet shall have an 11'' (279 mm) x 8-1/2'' (216 mm) water area. Toilet shall be 12''' (305 mm) rough-in with a 2-1/8'' (54 mm) glazed trapway and less supply. Toilet shall have a Class Five flushing system with a flush rate of 1.28 gpf (4.8 lpf). Toilet shall include seat and cover. Toilet shall be Kohler Model K-3615-\_\_\_\_\_.

## GABRIELLE

<b>Optional Ac</b>	ptional Accessories			
K-9464-L	Left-hand trip lever – non-CP	🗅 PB	Other	
K-9464-R	Right-hand trip lever – non-CP	🗆 PB	□ Other	

#### **Technical Information**


Fixture:			
Configuration	One-piece, elongated		
Water per flush	1.28 gal (4.8 L)		
Passageway	2-1/8" (54 mm)		
Water area	11″ (279 mm) x 8-1/2″ (216 mm)		
Water depth from rim	6" (152 mm)		
Seat post hole centers	5-1/2" (140 mm)		
Included components:			
Tank cover		85407	
Left-hand trip lever OR		1025329	
Right-hand trip lever		1025330	
Toilet seat		K-4713	
Tank accessory pack		52265	

Included components:	
Bolt cap accessory pack	52048

#### **Installation Notes**

Install this product according to the installation guide.

Will comply with the American Disabilities Act **(ADA)** when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

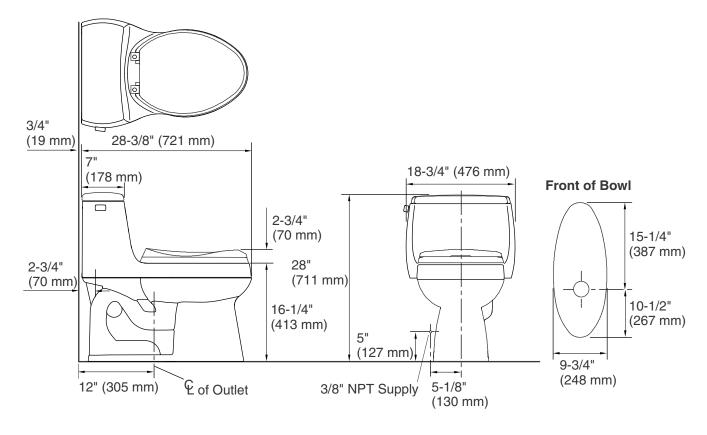

### **Product Diagram**

