

HIGHLINE_®

Features

- Vitreous china
- Elongated bowl
- Class Five® flushing system
- Polished chrome trip lever
- Less seat and supply
- 12" (305 mm) rough-in
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) glazed trapway
- 11-3/8" (289 mm) x 8" (203 mm) water area
- 29-3/4" (756 mm) x 18" (457 mm) x 31-1/4" (794 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.19.2/CSA B45.1
- EPA WaterSense®

CLASS FIVE® TOILET K-3999

CSA B651 ADA

OBC





Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Trip Lever	Colors/Finishes	
K-3999	Class Five toilet	left-hand	□0	☐ Other
K-3999-RA	Class Five toilet	right-hand	□0	☐ Other
K-3999-RZ	Class Five toilet with Insuliner® and tank cover locks	right-hand	□ 0	☐ Other
K-3999-T	Class Five toilet with tank cover locks	left-hand	□0	☐ Other
K-3999-TR	Class Five toilet with tank cover locks	right-hand	□ 0	☐ Other
K-3999-U	Class Five toilet with Insuliner	left-hand	□0	☐ Other
K-3999-UR	Class Five toilet with Insuliner	right-hand	□0	☐ Other
K-3999-UT	Class Five toilet with Insuliner and tank cover locks	left-hand	□ 0	☐ Other

Reco	Recommended Accessories			
K-46	36	Cachet _® Quiet-Close™ seat with Quick-Release™ functionality	□ 0	☐ Other
K-46	88	Cachet elongated toilet seat with cover	□ 0	☐ Other
K-47	31	$Stronghold_{\tiny{\textcircled{\tiny{0}}}}\ elongated\ open-front\ toilet\ seat-for\ Accessibility\ compliance$	□ 0	☐ Other

Product Specification

The elongated bowl toilet shall be made of vitreous china. Toilet shall be 29-3/4" (756 mm) in length, 18" (457 mm) in width, and 31-1/4" (794 mm) in height with a 11-3/8" (289 mm) x 8" (203 mm) water area. Toilet shall be 1.28 gpf (4.8 lpf) with Class Five flushing system. Toilet shall include polished chrome trip lever. Toilet shall have 2-1/8" (54 mm) glazed trapway. Toilet shall be 12" (305 mm) rough-in. Toilet shall be less seat and supply. Toilet shall be Kohler Model K-3999-

www.kohler.com

HIGHLINE_®

Recommend	ded Accessories (Cont.)	
K-7637	Angle supply with stop – 3/8" NPT	☐ Other

Technical Information

Fixture:	
Configuration	Two-piece, elongated
Water per flush	1.28 gpf (4.8 lpf)
Passageway	2-1/8" (54 mm)
Water area	11-3/8" (289 mm) x 8" (203 mm)
Water depth from rim	5-3/8" (137 mm)
Seat post hole centers	5-1/2" (140 mm)

Included components:	ncluded components:			
Bowl	K-4199			
Tank	K-4467			
Tank cover	1138565			
Trip lever	K-9379			
Bolt cap accessory pack	1013092			


Installation Notes

Install this product according to the installation guide.

Will comply with the American Disabilities Act (ADA) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

Will comply with **CSA B651** when installed per Clause 4.3.6 of the standard.

Will comply with **OBC** when installed per Clause 3.8.3.8 and 3.8.3.9.

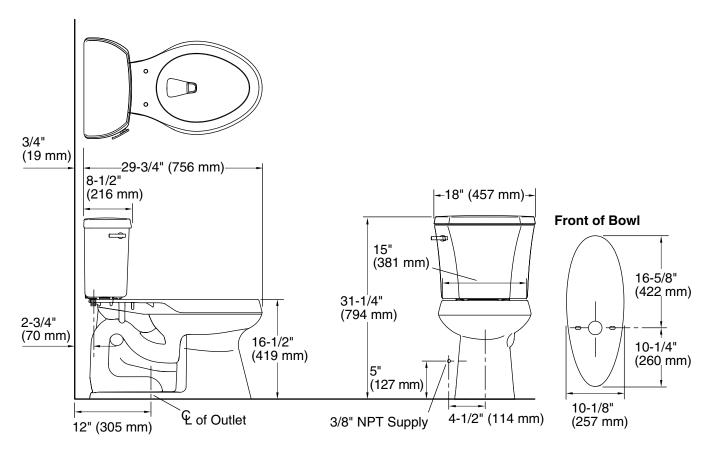

Product Diagram

