

Features


- Cast acrylic
- Freestanding bath
- Cast integral overflow increases bathing depth
- Included drain and drain cover
- 65-13/16" (1672 mm) x 36" (914 mm) x 25-3/16" (640 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.11/IAPMO Z401
- ASME A112.18.2/CSA B125.2 [Drain]

FREESTANDING BATH K-1805

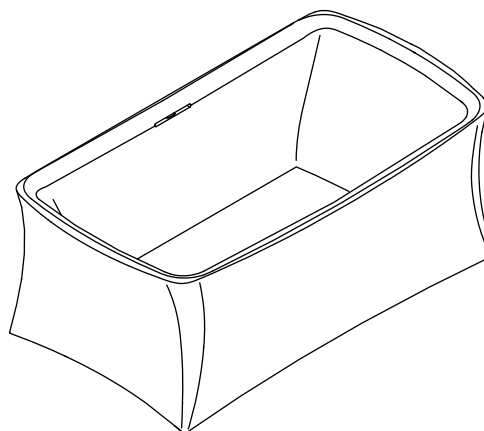

Colors/Finishes

- HW1: Honed White

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes
K-1805	Freestanding bath	<input type="checkbox"/> HW1

Recommended Accessories			
K-923	Laminar wall or ceiling-mount bath filler	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-994-4	Floor-mount bath filler with handshower	<input type="checkbox"/> CP	
K-10129-4	Floor-mount bath filler with handshower	<input type="checkbox"/> CP	

Product Specification

The freestanding bath shall be made of cast acrylic. Product shall be 65-13/16" (1672 mm) in length, 36" (914 mm) in width, and 25-3/16" (640 mm) in height. Bath shall include drain and drain cover. Bath shall have cast integral overflow, which increases bathing depth. Bath shall be Kohler Model K-1805-_____.

ALIENTO™

Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	45-1/2" (1156 mm) x 26" (660 mm)
Basin area, top	63-1/4" (1607 mm) x 30-3/16" (767 mm)
Weight	524 lbs (237.7 kg)
To overflow:	
Water depth	18-1/2" (470 mm)
Capacity	115 gal (435.3 L)
* Approximate measurements for comparison only.	

Installation Notes


Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 87 lbs/square foot (423 kg/square meter) loading.

Install a standard 1-1/2" bath drain pipe so that it extends 2-1/8" (54 mm) above the finished floor.

Cast acrylic baths are extremely heavy, making some installations difficult.

NOTE: Use lifting straps to lift or move the bath.

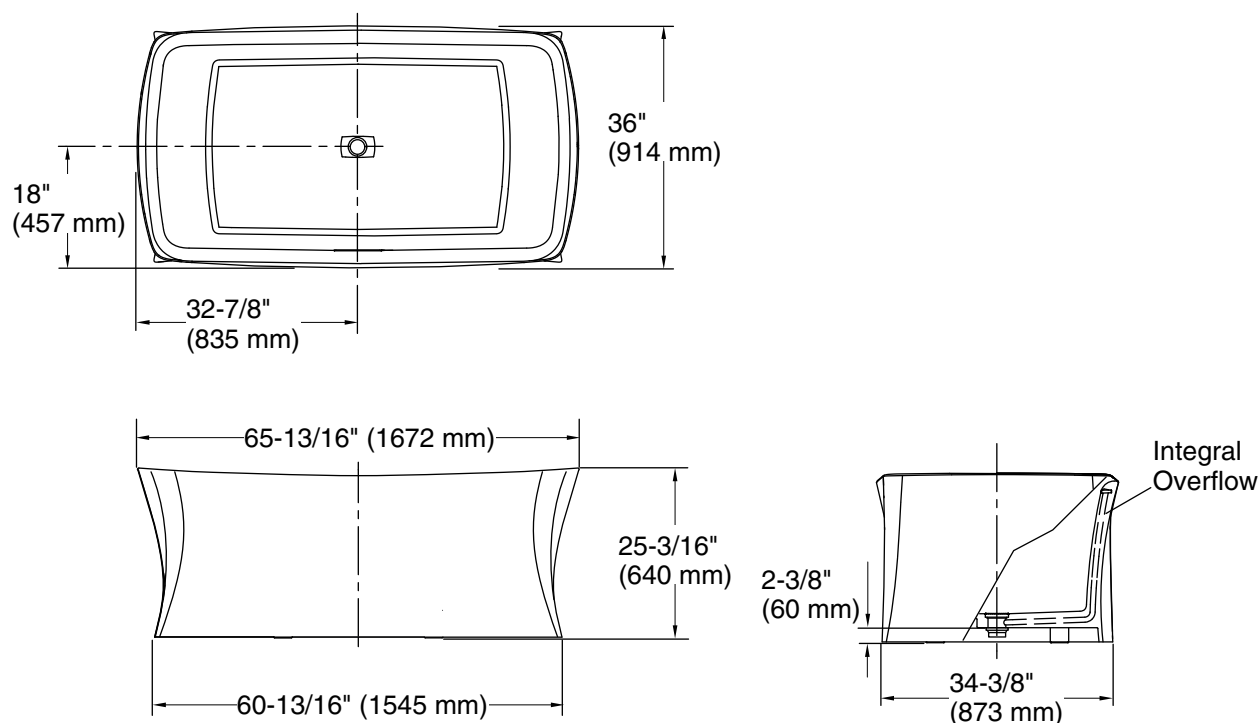

Product Diagram