

KINLOCK_{TM}

SERVICE SINK FAUCET

Features

- Brass construction
- For 8" (203 mm) centers
- Brass valve bodies
- Valvet_® valves
- Internal NPT connections
- ADA compliant lever handles
- Vacuum breaker
- 4-5/8" (117 mm) threaded spout for hose connection
- 7-1/4" (184 mm) wall-to-spout outlet
- Pail hook
- Wall brace

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/cUPC
- ADA

Colors/Finishes

CP: Polished Chrome

RP: Rough Plate

Specified Model

Model	Description	С	Colors/Finishes	
K-8907	Service sink faucet) CP	□ RP

Product Specification


Two-handle service sink faucet shall be of brass construction. Faucet shall feature brass valve bodies. Faucet shall also feature Valvet valves. Product shall include 8" (203 mm) centers, 4-5/8" (117 mm) threaded spout for hose connection, 7-1/4" (184 mm) wall-to-spout outlet, lever handles, pail hook, vacuum breaker, wall brace, and internal NPT connections. Faucet shall be Kohler Model K-8907-_____.

K-8907

KINLOCKTM

Installation Notes

Install this product according to the installation guide. Product complies with ASME A112.18.1/CSA B125.1. All dimensions are nominal.

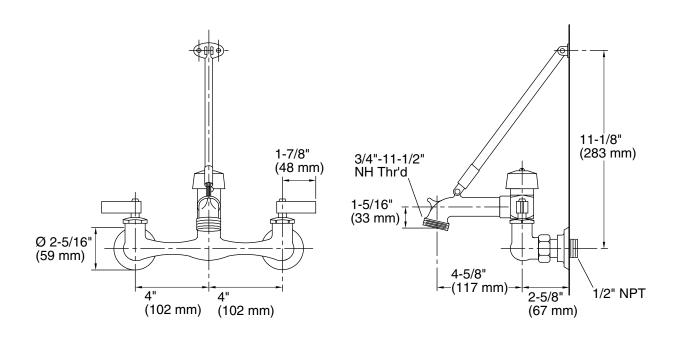

Product Diagram

