


#### Features

- Acrylic
- Textured bottom surface
- Available for drop-in installation [K-1219]
- Available for three-side alcove installation with integral tile flange [K-1219-L, K-1219-R]
- Optional K-1278 removable apron
- 60" (1524 mm) x 32" (813 mm) x 20" (508 mm)

#### Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124

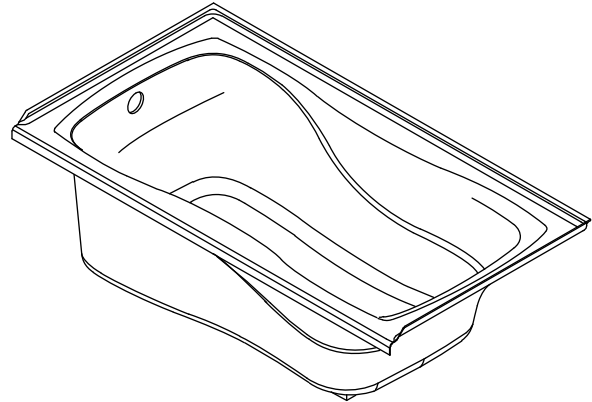

#### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### Accessories:

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

#### Specified Model

Model	Description	Colors/Finishes		
K-1219	Drop-in rim style	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
K-1219-L	Integral tile flange, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
K-1219-R	Integral tile flange, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
<b>Recommended Accessories</b>				
K-7161-AF	Bath drain – above or through-the-floor installation	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
<b>Optional Accessories</b>				
K-1278	Removable apron	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
K-1181	132" (3353 mm) vinyl tiling-in bead			<input type="checkbox"/> NA

#### Product Specification

The acrylic bath shall be 60" (1524 mm) in length, 32" (813 mm) in width, and 20" (508 mm) in height. Bath shall have a textured bottom surface. Bath shall be available for drop-in installation [K-1219] or three-side alcove installation with integral tile flange [K-1219-L, K-1219-R]. Bath shall have an optional K-1278 removable apron available. Bath shall be Kohler Model K-1219-\_\_\_\_-\_\_\_\_ or K-1219-\_\_\_\_-\_\_\_\_.

# HOURGLASS® 32

## Technical Information


Fixture*:	
Bathing well:	
Basin area, bottom	47" (1194 mm) x 20" (508 mm)
Basin area, top	53" (1346 mm) x 23" (584 mm)
Weight	80 lbs (36.3 kg)
To overflow	
Water depth	14-1/2" (368 mcm)
Capacity	64 gal (242.3 L)
* Approximate measurements for comparison only.	

## Installation Notes

Install this product according to the installation guide.

Floor support under this product must provide for a minimum of 48 lbs/square foot (234 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

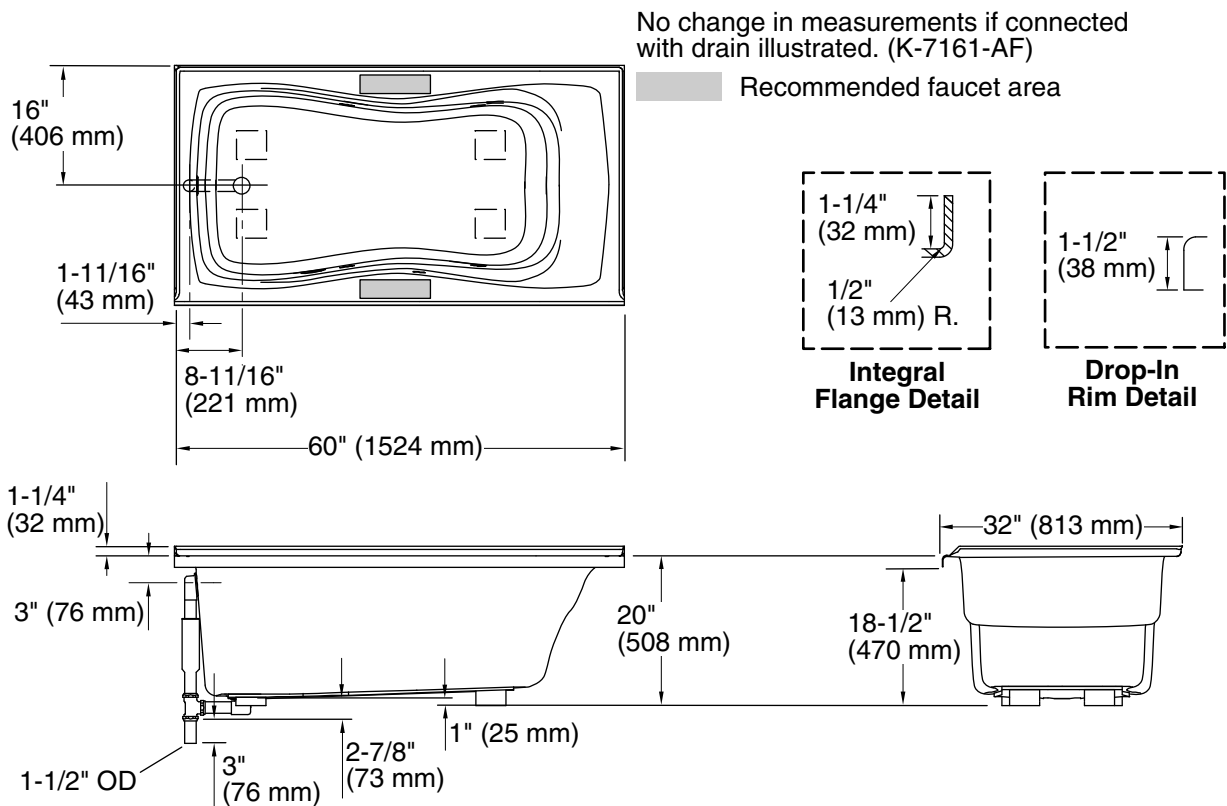

## Product Diagram