

BANCROFT_®

Features

- Katalyst™ Spray Technology with air induction ball joint (patent pending)
- Optimized sprayface for maximum performance
- 2.0 gallons (7.6 L) per minute flow rate
- Single-function showerhead with 48 nozzle 5-15/16" (15.1 cm) diameter sprayface
- Complements Bancroft_® Suite
- MasterClean™ spray nozzles to prohibit mineral build-up for easy cleaning
- 1/2" 14 NPT connection


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- EPA WaterSense_®

SINGLE-FUNCTION SHOWERHEAD K-14519





Colors/Finishes

- · CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishe	Colors/Finishes	
K-14519	Single-function showerhead	□ CP	☐ Other	
Recommended Accessories				
K-7397	7-1/2" (13.7 cm) shower arm and flange	□ CP	☐ Other	


Product Specification

The single-function showerhead shall be with 48 nozzle 5-15/16″ (15.1 cm) diameter sprayface. Showerhead shall have Katalyst™ spray technology with air induction ball joint (patent pending) and optimized sprayface for maximum performance. Showerhead shall include MasterClean™ spray nozzles to prohibit mineral build-up for easy cleaning. Showerhead shall have a 2.0 gpm (7.6 L) per minute flow rate and a 1/2″-14 NPT connection. Showerhead shall be Kohler Model K-14519-____.

BANCROFT_®

Installation Notes

Install this product according to the installation guide.

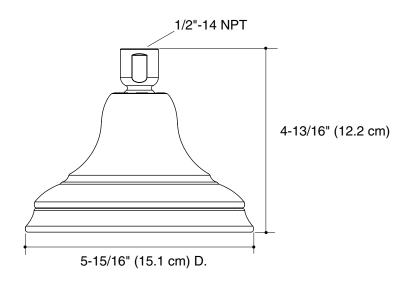

Product Diagram

