

NATURE'S CHEMISTRYTM SPUN GLASS®

Features

- · Above-the-counter or self-rimming
- Without overflow
- Soda lime glass
- ADA compliant when distance from rim to floor is 34" (864 mm) [drop-in only]
- Optional wall-mount bracket (K-9655)
- 17-1/2" (445 mm) diameter


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA (drop-in only)
- ASME A112.19.2/CSA B45.1
- ICC/ANSI A117.1 (self-rimming only)

VESSELS BATHROOM SINK K-2276

ADA

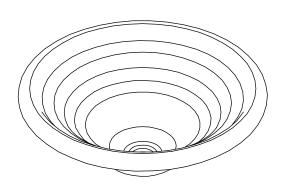

Colors/Finishes

- B1: Clear Glass
- B2: Aquamarine Glass
- B3: Cobalt Glass

Accessories

- CP: Polished Chrome
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors	Colors/Finishes		
K-2276	Bathroom sink - above-counter or drop-in	□ B1	□ B2	□ B3	
Recomme	nded Accessories				
K-7114	Pop-up drain OR	□ CP	☐ Oth	☐ Other	
K-7725	Bathroom sink drain with non-overflow – non-removable stopper OR				
K-7726	Bathroom sink grid drain with non-overflow	□ CP	☐ Oth	ner	
K-9018	P-Trap	□ CP	☐ Oth	er	
Optional A	Accessories	<u> </u>	1		
K-9655	Vessels wall-mount bracket		□NA		

Product Specification

The bathroom sink shall be made of soda lime glass. Bathroom sink shall be 17-1/2" (445 mm) in diameter. Bathroom sink shall be above-counter or drop-in. Bathroom sink shall be without overflow. Bathroom sink shall have optional wall-mount bracket (K-9655). Bathroom sink shall be ADA compliant when distance from rim to floor is 34" (864 mm). Bathroom sink shall be Kohler Model K-2276-

NATURE'S CHEMISTRY™ SPUN GLASS®

Technical Information

Fixture*:				
Basin area	Ø 15" (381 mm)			
Water depth	Ø 5-1/2" (140 mm)			
Drain hole	Ø 1-3/4" (44 mm)			
* Approximate measurements for comparison only.				

Included components:				
Installation tape	84938			
Cut-out template	115888-7			

Installation Notes

Install this product according to the installation guide.


Product does not have an overflow.


Spout must be 5" (127 mm) long (min) for adequate clearance into lavatory when installed with centerline as shown.

Spout must be tall enough to clear 3" (76 mm) rim height and provide a 1" (25 mm) air gap per ASME A112.1.2.

Diagram is based on the K-9018 P-trap with a 1'' (25 mm) tailpiece exposed.

Will comply with **ADA** when installed be Section 606 Lavatories of the Act.

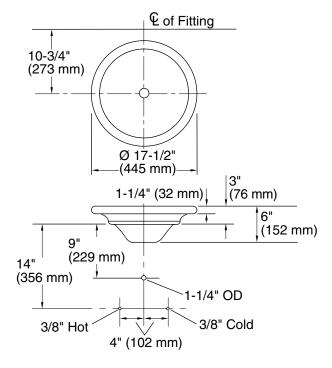

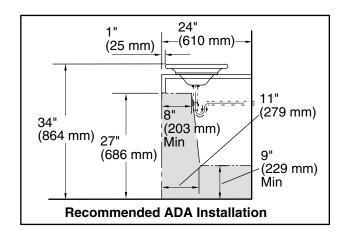

Standard Installation

Product Diagram

