


Features

- Brass construction
- Wall-mount
- Brass valve body
- Single-handle control
- Trickle flow from any two outlets to a variable flow from a single outlet
- One 3/4" NPT inlet connection
- Three 1/2" NPT outlet connections
- Intended for use with KOHLER_® bath and shower supply valves
- Can be converted from 3 outlets (360° handle rotation) to 2 outlets (120° handle rotation)

Codes/Standards Applicable

Specified model meets or exceeds the following:

• ASME A112.18.1/CSA B125.1



MASTERSHOWER_®

VALVE

K-737-K

THREE-WAY/TWO-WAY DIVERTER

Colors/Finishes

NA: None applicable

| ſ | Model | Description | Colors/Finishes |
|---|---------|----------------------------------|-----------------|
| | K-737-K | Three-way/Two-way diverter valve | 🗅 NA |

Product Specification

The single-handle wall-mount three-way/two-way diverter valve shall be made of brass construction with brass valve body. Product shall feature one 3/4" NPT inlet connection and three 1/2" NPT outlet connections. Product can be converted from 3 outlets (360° handle rotation) to 2 outlets (120° handle rotation). Product shall feature a trickle flow from any two outlets to a variable flow from a single outlet. Product is intended for installation with any KOHLER bath and shower supply valves. Diverter valve shall be Kohler Model K-737-K-NA.

Specified Model

MASTERSHOWER®


Installation Notes

Install this product according to the installation guide.

Product is not intended for use as a shut-off valve.

Never plug an outlet port without completing the two-way conversion.

Product requires a mixed water supply to the inlet.

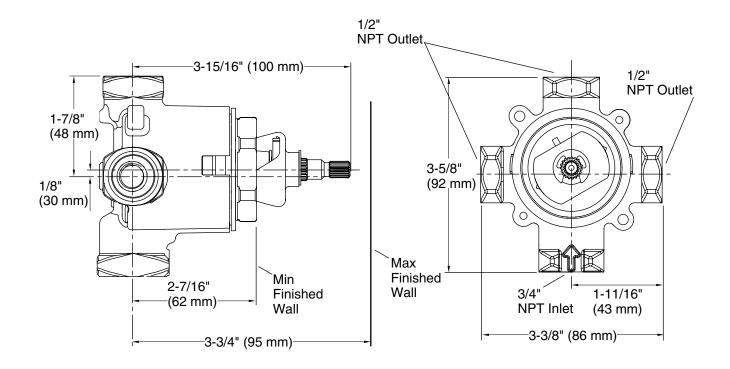

Product Diagram



