

Features

- For use in bath and shower installations
- Shower column includes shower hose
- Designed for new installations or retrofit to replace an existing installed shower arm
- Incorporates two position diverter for Rainhead showerhead or handshower operation
- For use with temperature/volume control mixing valve (not supplied)
- Check valves installed in shower hose and diverter valve for backflow prevention
- For use with Katalyst™ Rainhead (see table)

Codes/Standards Applicable

Specified model meets or exceeds the following:

ASME A112.18.1/CSA B125.1

SHOWER COLUMN K-45209 ALSO K-45210



Colors/Finishes

· CP: Polished Chrome

BN: Brushed Nickel

Specified Model

| Model | Description | Colors/Finishes | |
|-----------------------|---|-----------------|------|
| K-45209 | Bath/shower column – arched (shown) | □ CP | □ BN |
| K-45210 | Bath/shower column – beam | □ CP | □ BN |
| | | | |
| Optional A | ccessories | | |
| Optional A K-13688 | ccessories 8" Contemporary Round Katalyst Rainhead | □ CP | □ BN |
| K-13688 | | □ CP | □ BN |
| | 8" Contemporary Round Katalyst Rainhead | | |

Product Specification

The bath/shower column shall be used in bath and shower installations. Shower column shall include shower hose and incorporate two position diverter for Rainhead showerhead or handshower operation. Product shall have check valves installed in shower hose and diverter valve for backflow prevention. Product shall be used with temperature/volume control mixing valve (not supplied). Product shall be designed for new installations or retrofit to replace an existing shower arm. Shower column shall be for use with Katalyst Rainheads (see table). Product shall be Kohler Model K-


Installation Notes

Install this product according to the installation guide.

IMPORTANT! For retrofit/remodel installations: Check the existing shower enclosure for adequate clearances before proceeding with the shower column installation. Refer to the Roughing-in for the shower column and Rainhead.

Verify the distances between:

- The ceiling and the center of the existing shower arm at the finished wall surface.
- The shower floor and the center of the existing shower arm at the finished wall surface. Ensure sufficient clearance under the Rainhead.
- The center of the existing shower arm and the center of the mixing valve trim.

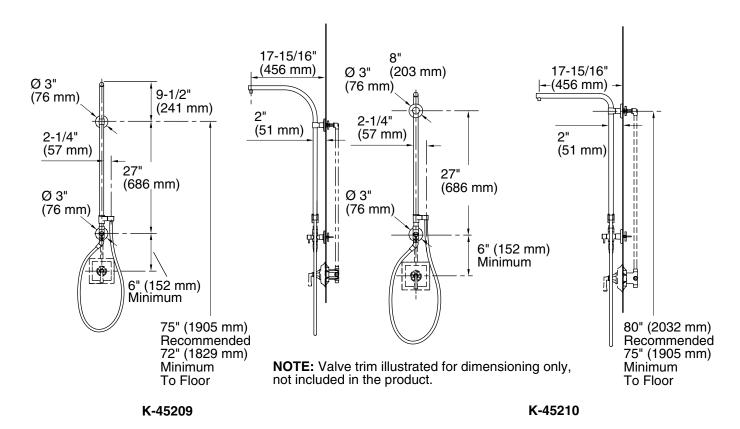

Product Diagram

