

MARIPOSA®

Features


- Acrylic
- Pump with air switch and grounding-type plug-in cord
- 6 individually adjustable multi-directional hydro-massage jets
- Left or right drain
- In-line heater
- Optional K-1283 removable apron
- Optional K-1491 removable bath pillow
- Optional K-9696 whirlpool trim kit in various finishes
- 72" (1829 mm) x 36" (914 mm) x 20" (508 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASME A112.19.7
- UL 1795
- ASTM E162
- ASTM E662

BATH WHIRLPOOL WITH CUSTOM PUMP K-1257-CB

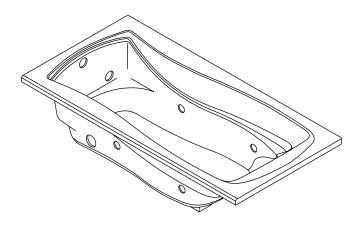

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- · CP: Polished Chrome
- PB: Vibrant_® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description			Colo	Colors/Finishes	
K-1257-CB	Bath whirlpool with custom pump – drop-in rim style			□ 0	□ Other_	
Recommend K-7166-AF	ded Accessories Adjustable pop-up drain – above or through-the-floor installa	tion	□ CF	P PB	□ Other	
Optional Ac	cessories					
Optional Ac K-1283	cessories Removable apron			0	☐ Other	
					☐ Other	

Product Specification

The acrylic bath whirlpool shall be 72" (1829 mm) in length, 36" (914 mm) in width, and 20" (508 mm) in height. Product shall have 6 individually adjustable multi-directional hydro-massage jets, a pump with air switch, and grounding-type plug-in cord. Product shall have an optional K-1283 removable apron, an optional K-1491 removable bath pillow and an optional K-9696 trim kit in various finishes. Bath whirlpool shall be Kohler Model K-1257-CB-_____.

MARIPOSA_®

Technical Information

Fixture*:					
Bathing well:	Bathing well:				
Basin area, bottom	50" (1270 mm) x 24" (610 mm)				
Basin area, top	65" (1651 mm) x 27" (686 mm)				
Weight	110 lbs (49.9 kg)				
To overflow:	To overflow:				
Water depth	14" (356 mm)				
Capacity	72 gal (272.5 L)				
* Approximate measurements for comparison only.					

Drop-in cut-out	70" (1778 mm) x 34" (864 mm)			
Pump:		V	Hz	А
1-speed		120	60	7.5

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):		
Pump/control	120 V, 15 A, 60 Hz	
Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.		


Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 41 lbs/square foot (200 kg/square meter) loading.

The apron must be installed before the finished floor and wall materials are installed.

Pump must be relocated to custom position at the time of installation. Provide adequate clearance.

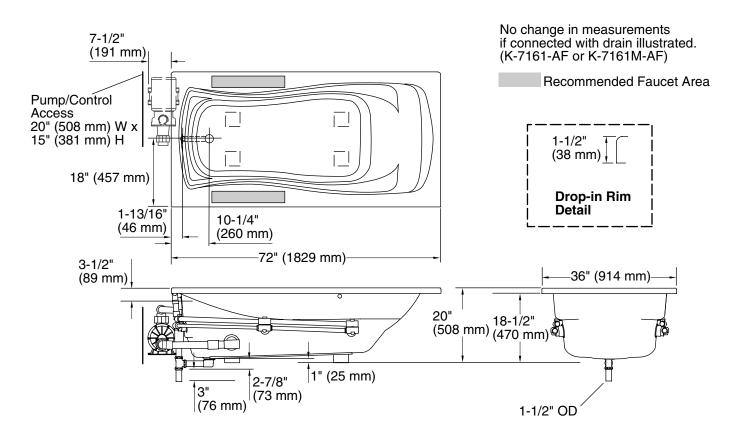

Product Diagram

