


Features

- Acrylic
- Drop-in installation
- Molded lumbar support
- 81 gallon (306.6 L) capacity
- 60" (1524 mm) x 32" (813 mm) x 21" (533 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662

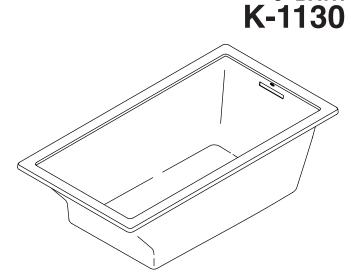

UNDERSCORETM

5' BATH

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

Model	Description	Color	olors/Finishes	
K-1130	5' bath – drop-in	0 🗆		Other
Required A	ccessories			
K-7271	Clearflo slotted overflow brass bath drain OR		🗆 CP	Other
K-7272	Clearflo slotted overflow bath drain - PVC pipe		□ CP	Other
Optional Ac	ccessories			
K-590	Under-mount kit			🗆 NA

Product Specification

The acrylic bath shall be 60" (1524 mm) in length, 32" (813 mm) in width, and 21" (533 mm) in height. Bath shall be for drop-in installation. Bath shall have an 81 gallon (306.6 L) capacity. Bath shall have a molded lumbar support. Bath shall be Kohler Model K-1130-____.

UNDERSCORE_{TM}

Technical Information

Fixture*:				
Bathing well:				
Basin area, bottom	42" (1067 mm) x 23-1/2" (597 mm)			
Basin area, top	55-1/8" (1400 mm) x 27-1/8" (689 mm)			
Weight	75 lbs (34 kg)			
To overflow:				
Water depth	17-1/8" (43.5 cm)			
Capacity	81 gal (306.6 L)			
* Approximate measurements for comparison only.				
Drop-in cut-out 5	9-1/2″ (1511 mm) x 31-1/2″ (800 mm)			

Installation Notes

Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 58 lbs/square foot (284 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

