


Features

- Acrylic
- Drop-in installation
- Molded lumbar support
- 102 gallon (386 L) capacity
- 66" (1676 mm) x 36" (914 mm) x 22" (559 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662



UNDERSCORE_{TM}

5.5' BATH

K-1136

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

Model	Description	Colors/Finisl	Colors/Finishes	
K-1136	5.5' bath – drop-in	0	Other	
Required A	ccessories			
K-7271	Clearflo slotted overflow brass bath drain OR	🗆 CP	Other	
K-7272	Clearflo slotted overflow bath drain - PVC pipe	D CP	Other	
Optional Ac	cessories			
K-591	Under-mount kit			

Product Specification

The acrylic bath shall be 66" (1676 mm) in length, 36" (914 mm) in width, and 22" (559 mm) in height. Bath shall be for drop-in installation. Bath shall have a 102 gallon (386 L) capacity. Bath shall have a molded lumbar support. Bath shall be Kohler Model K-1136-____.

UNDERSCORE_{TM}

Technical Information


Fixture*:			
Bathing well:			
Basin area, bottom	44-1/2" (1130 mm) x 26-1/2" (673 mm)		
Basin area, top	60-1/4" (1530 mm) x 30-1/4" (768 mm)		
Weight	80 lbs (36.3 kg)		
To overflow:			
Water depth	17-3/4" (451 mm)		
Capacity	102 gal (386 L)		
* Approximate measurements for comparison only.			
Drop-in cut-out 6	65″ (1651 mm) x 35″ (889 mm)		

Installation Notes

Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 58 lbs/square foot (283 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

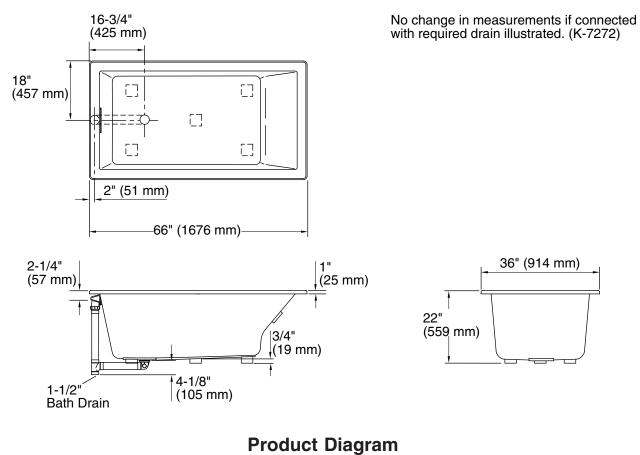

UNDERSCORE™ 5.5' BATH Page 2 of 2 1087303-4-**D**

