


Features

- Ceramic spout
- Brushed nickel lever handle and valve
- One-piece self-contained ceramic disc valve allows
 both volume and temperature control
- Flexible supplies for easy installation
- Touch-activated drain with tailpiece
- 4-1/2" (114 mm) spout reach
- Single-hole mounting
- 1.5 gallons (5.7 liters) per minute maximum flow rate


Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- CSA B651
- *OBC*
- ASME A112.18.1/CSA B125.1
- NSF 61
- All applicable US Federal and State material regulations
- EPA WaterSense®



SINGLE-HANDLE BATHROOM SINK





FAUCET

Colors/Finishes

- 0: White
- 7: Black Black™
- 96: Biscuit
- Other: Refer to Price Book for additional colors/finishes

Specified Model

	Description	Colors/Finishes			
K-11000	Single-handle bathroom sink faucet	0 🗆	07	96	Other
	Single-handle bathroom sink faucet – with Marrakesh™ design			96	
	Single-handle bathroom sink faucet – with Maharani™ design			96	
	Single-handle bathroom sink faucet – with Silkweave™ design	0 🗆			

Product Specification

The single-handle bathroom sink faucet shall have a ceramic spout with a brushed nickel lever handle and valve. Product shall have a maximum flow rate of 1.5 gallons (5.7 liters) per minute. Product shall feature a one-piece, self-contained ceramic disc valve, allowing both volume and temperature control. Product shall feature a 4-1/2" (114 mm) spout reach, flexible supplies for easy installation, and a touch-activated drain with tailpiece. Product shall be for single-hole mounting. Faucet shall be Kohler Model K-11000-_____ or K-11000-_____.

BOL®


Technical Information

Included components:	
Drain	1035625

Installation Notes

Install this faucet according to the installation instructions provided.

ADA, **CSA B651**, **OBC** compliant when installed to the specific requirements of these regulations.

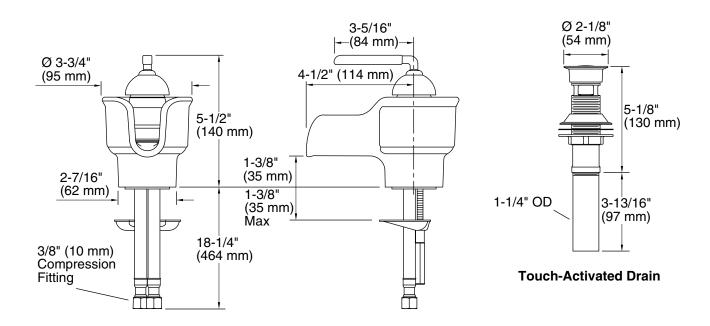

Product Diagram

