

### Features


- Vitreous china
- Elongated bowl
- Siphon jet
- Wall-mount
- With bedpan lugs (-L)
- 1-1/2" rear spud
- 1.6 gpf (6 lpf) or 1.28 gpf (4.8 lpf)
- 10-1/2" (267 mm) x 9" (229 mm) water area
- 26-1/2" (673 mm) x 16-1/2" (419 mm) x 13-1/4" (337 mm)
- Will replace K-4329 and K-4329-L bowls

### BOWL K-4323

ADA

CSA B651

OBC

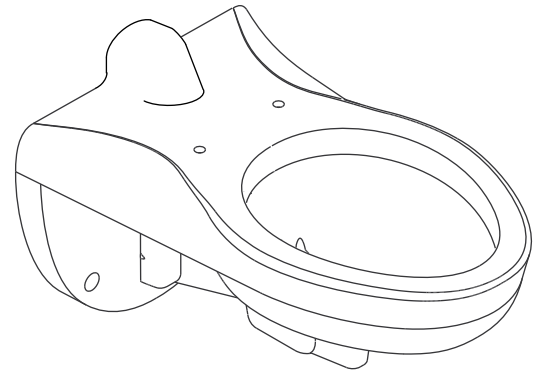

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.19.2/CSA B45.1
- Energy Policy Act of 2005

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-4323	Bowl – elongated	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-4323-L	Bowl – elongated, with bedpan lugs	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Recommended Accessories			
K-4731-C	Stronghold® open-front elongated seat	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-4731-SC	Stronghold open-front elongated seat with integrated handle	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-4731-GC	Stronghold Quiet-Close™ open-front elongated seat	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

### Product Specification

The elongated bowl shall be made of vitreous china. Product shall be 26-1/2" (673 mm) in length, 16-1/2" (419 mm) in width, and 13-1/4" (337 mm) in height with a 10-1/2" (267 mm) x 9" (229 mm) water area. Product shall feature a 1-1/2" rear spud and siphon jet. Product shall be for wall-mount installation. Product shall feature 1.28 gpf (4.8 lpf) or 1.6 gpf (6 lpf) depending on flushometer specified. Product shall be available with bedpan lugs (-L). Bowl shall be Kohler Model K-4323-\_\_\_\_ or K-4323-L-\_\_\_\_

## Technical Information

Fixture*:	
Configuration	rear spud, elongated
Water per flush	1.28 gal (4.8 L) or 1.6 gal (6 L)*
Spud size	1-1/2"
Passageway	2-1/8" (54 mm)
Water area	10-1/2" (267 mm) x 9" (229 mm)
Water depth from rim	5-1/4" (133 mm)
Seat post hole centers	5-1/2" (140 mm)
Minimum static pressure required	35 psi (241.3 kPa)
Maximum static pressure	80 psi (551.6 kPa)
Minimum flowing pressure required	25 psi (172.4 kPa)
Required supply minimum	25 gpm (94.6 lpm)
* Designed to flush with 1.28 gal (4.8 L) or 1.6 gal (6 L) of water when installed with a water-saving flushometer.	

Included components:

Spud	18357
------	-------

## Installation Notes


Install this product according to the installation guide.

Refer to manufacturer's instructions and local codes for flushometer requirements.

Will comply with the American Disabilities Act (**ADA**) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

Will comply with **CSA B651** when installed per Clause 4.3.6 of the standard.

Will comply with **OBC** Barrier Free requirements when installed per Clause 3.8.3.8 and 3.8.3.9.

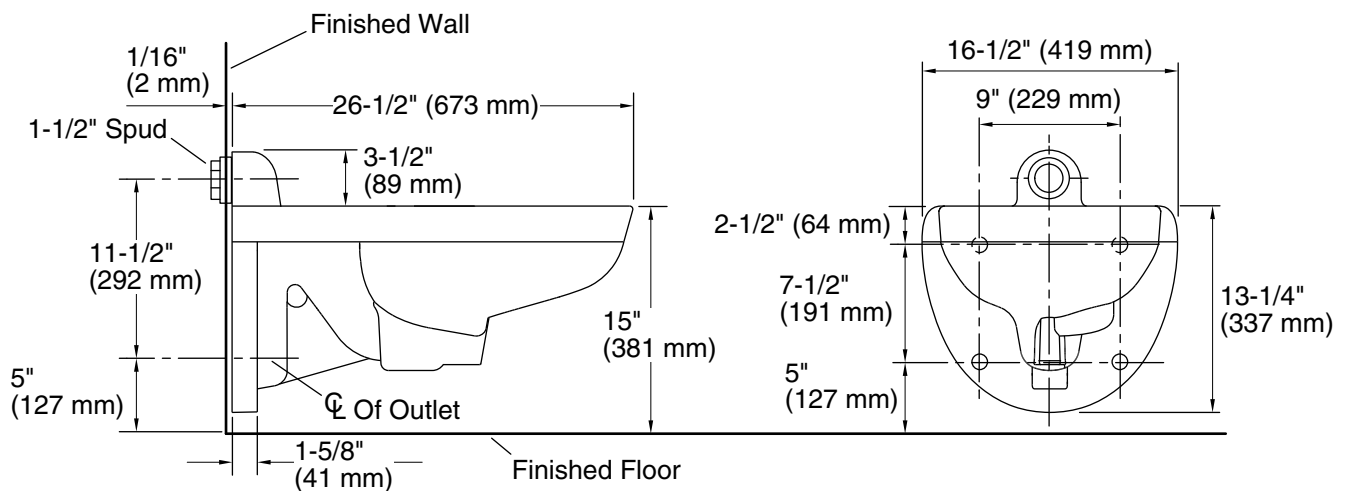

## Product Diagram